

**TEST EQUIPMENT
FOR MAINTENANCE, SERVICE
AND WORKPLACE SAFETY**



MEASUREMENT

Discover our test instruments
and their functions



PCE
INSTRUMENTS

TESTING MEASURING INSTRUMENTS

TEST INSTRUMENTS FROM GERMANY

Maintenance and Service

The company PCE Instruments based in Meschede-Freienohl in the German Sauerland region was founded in 1999 by three engineers. With more than 120 employees and several branches around the world, the company focuses on the development, production and distribution of high-performance and innovative products from the fields of measuring instruments, control systems, weighing equipment and laboratory technology.

PCE Instruments' wide range of products and services offers high precision and flexibility in any application as well as outstanding quality and functionality. The different fields can be seen in the overview.



PCE Instruments

Headquarters

PCE Deutschland GmbH
Im Langel 26
59872 Meschede
Germany

Phone

+49 (0) 2903 976 99 8903

Contact

info@pce-instruments.com

Subsidiary UK

PCE Instruments UK Ltd.
Suite 1N-B, Trafford House
Chester Rd., Manchester M32 0RS
United Kingdom

Phone

+44 (0) 161 464902 0

Contact

info@pce-instruments.co.uk



MEASURING INSTRUMENTS

The field of measuring instruments covers a multitude of innovative portable products as well as products for fixed installation that measure electrical, mechanical, biological and chemical parameters.

CONTROL SYSTEMS

The range of control systems covers the complete demand for sensors, displays, controllers and paperless recorders.

WEIGHING EQUIPMENT

The field of weighing equipment comprises a wide standard range of high-quality scales and balances that can be calibrated and/or verified for trade.

LABORATORY TECHNOLOGY

High-end analytical and laboratory devices have been developed for professional applications and in particular for use in laboratories.



DEVELOPMENT

In order to develop modified test equipment in line with customers' specifications, proficient engineers and technicians cooperate closely with the customer.

PRODUCTION

PCE Instruments manufactures industrial test instruments that help improving process analysis and optimisation.

CALIBRATION

Our DIN EN ISO 9001:2015 certified calibration laboratory verifies the measuring accuracy of our products. They calibrate pressure, hardness, force, material thickness, sound volume, conductivity, redox, vibration acceleration and more.

VIBRATION MEASUREMENT
VIBRATION METER

PCE-VT 3700 / PCE-VT 3700S

Handy entry-level device for vibration monitoring of machines and systems

The vibration meter is ideal for maintenance workers to quickly check vibrating parts, machines and systems. This vibration meter shows the vibration acceleration, vibration velocity and vibration displacement directly on the display. You can use the device to quickly and reliably detect machine imbalances which can lead to, for example, bearing damage. The vibration meter is equipped with a mode that

allows a measurement according to ISO 10816-3 to be carried out. The vibration meter analyzes the measured values and automatically shows a good / bad evaluation on the display. The vibration meter is supplied with a sensor on a spiral cable, magnet adapter, service bag and batteries. The ISO factory certificate completes the scope of delivery.

ISO cal option

- » automatic ISO 10816-3 evaluation
- » easy to handle
- » for mobile vibration measurement
- » coloured graphic display
- » peak-hold function




APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	Acceleration 0.0 ... 399.9 m/s ² 0.1 m/s ²	Optional accessories: PCE-VT NP PCE-VT VMH PCE-VT 3700 CASE CAL-PCE-VT 3700 PCE-VT 3xxx SENSOR Further models: PCE-VT 3750 PCE-VT 3750S
Resolution	±2 %	
Accuracy @ 160 Hz	10 Hz ... 1 kHz	
Frequency range	10 Hz ... 10 kHz	
Measuring range	Velocity 0.00 ... 399.9 mm/s 0.1 mm/s	
Resolution	±2 %	
Accuracy @ 160 Hz	10 Hz ... 1 kHz	
Frequency range		
Measuring range	Displacement 0.000 ... 3.9 mm 1 µm	
Resolution	±2 %	
Accuracy @ 160 Hz	10 Hz ... 200 Hz	
Frequency range		
Measurement parameters	RMS, Peak, Peak-Peak Crest factor switchable metric / imperial	
Units	3.5" LC display	
Display	English, German, French Spanish, Italian, Dutch Portuguese, Turkish, Polish Russian, Chinese, Japanese	
Menu languages	3 x 1.5 V AA batteries	
Power supply	-20 ... +65 °C / -4 ... 149 °F; 10 ... 95 % r.H.	
Operating and storage conditions	150 x 80 x 38 mm / 5.9 x 3.1 x 1.5"	
Dimensions	170 g / 6 oz	
Weight		
Sensor PCE-VT 3700	Sensor with spiral cable PCE-VT 3xxx SENSOR Magnet adapter PCE-VT VMH	
Sensor PCE-VT 3700S	Sensor with spiral cable PCE-VT 3xxx SENSOR Magnet adapter PCE-VT VMH Needle sensor PCE-VT NP Handgrip PCE-VT 3xxx HANDLE	

Technical data vibration sensor	
Resonance frequency	30 kHz
Transverse sensitivity	≤5 %
Destruction limit	5000 g (peak)
Operating and storage temperature	-20 ... +80 °C / -4 ... 176 °F; max. 95 % r.H.
Housing material	Stainless steel
Mounting thread	M5
Dimensions	16 x 36 mm / 0.6 x 1.4"
Weight (without cable)	35 g / 1.2 oz

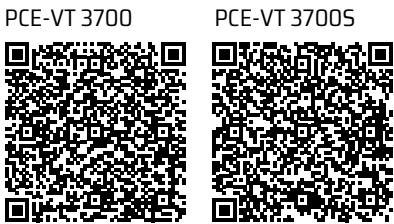

Subject to changewithout notice

VIBRATION MEASUREMENT
VIBRATION ANALYZER

PCE-VT 3800 / PCE-VT 3800S

Vibration analyzer with external sensor / data logger function

The vibration analyzer is the ideal companion for checking vibrating parts, machines and plant. With the external vibration sensor of the vibration meter, the vibration displacement up to 3.9 mm, the vibration velocity up to 399.9 mm/s and the vibration acceleration up to 399.9 m/s² can be determined. RMS, peak, peak-to-peak and crest factor are available as measurement parameters on the vibration

meter. Another function of the vibration measuring device is the automatic evaluation according to ISO 10816-3. Accordingly, the vibration meter can determine the current vibration state of a machine via a good/bad evaluation. This means that the vibration meter is used, for example, for repair and maintenance work on machines.

ISO cal option

- » data logger function
- » automatic ISO 10816-3 evaluation
- » measuring range up to 399.9 m/s² / 15744 in/s²
- » hand-held device for mobile vibration measurement
- » rechargeable battery
- » 2.48" LC display



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	Acceleration 0.0 ... 399.9 m/s² / 0.0 - 15744 in/s²	Housing material	stainless steel
Resolution	0.1 m/s² / 3.94 in/s²	Mounting thread	¼ - 28"
Accuracy @ 160 Hz	±2 %	Dimensions	Ø 17 x 46 mm / 0.67 x 1.8"
Frequency range	10 Hz ... 10 kHz 1 kHz ... 10 kHz	Weight (without cable)	52 g / 1.8 oz
Measuring range	Velocity 0.00 ... 399.9 mm/s / 0.00 - 15.74 in/s	Sensor PCE-VT 3800	Sensor with spiral cable PCE-VT 3xxx SENSOR Magnet adapter PCE-VT VMH
Resolution	0.1 mm/s / 0.0039 in/s	Sensor PCE-VT 3800S	Sensor with spiral cable PCE-VT 3xxx SENSOR Needle sensor PCE-VT NP Handle PCE-VT 3xxx HANDLE Optional
Accuracy @ 160 Hz	±2 %		
Frequency range	10 Hz ... 1 kHz		
Measuring range	Displacement 0.000 ... 3.9 mm / 0.000 - 0.154 in	accessories:	
Resolution	1 µm / 39.4 µin	PCE-VT NP	Needle sensor
Accuracy @ 160 Hz	±2 %	PCE-VT VMH	Magnet adapter
Frequency range	10 Hz ... 200 Hz	CAL-PCE-VT 3xxx	ISO Calibration Certificate
		PCE-VT 3xxx SENSOR	Replacement vibration sensor
Measurement parameters	RMS, Peak, Peak-Peak Crest factor	Further models:	
Manual memory	99 folders with 50 measured values each	PCE-VT 3850	incl. sensor, magnetic adapter, headset
Data logger	Various start/stop triggers Measurement interval between 1 s ... 12 h 50 memory locations with 43.200 measured values each	PCE-VT 3850S	incl. needle sensor with handgrip, headset
Units	can be switched to metric / imperial		
Display	2.8" LC display		
Menu languages	English, German, French Spanish, Italian, Dutch Portuguese, Turkish, Polish Russian, Chinese, Japanese		
Power supply	internal: LiPo battery (3.7 V, 2.500 mAh) external: USB 5 VDC, 500 mA		
Operating time	approx. 15 ... 20 h (depending on display brightness)		
Operating and storage conditions	temperature: -20 ... +65 °C / -4 ... 149 °F humidity: 10% RH ... 95% RH, non-condensing		
Protection Class	IP52		
Dimensions	165 x 85 x 32 mm / 6.5 x 3.3 x 1.3"		
Weight	239 g / 8.4 oz		
Technical Data Vibration Sensor			
Resonance frequency	24 kHz		
Transverse sensitivity	≤5 %		
Destruction limit	5000 g (peak)		
Operating and storage temperature	-55 °C ... +150 °C / -67 °F ... 302 °F		



Subject to changewithout notice

VIBRATION MEASUREMENT
VIBRATION ANALYZER

PCE-VT 3900 / PCE-VT 3900S

Vibration analyzer with internal memory / route measurement

The vibration analyzer is an ideal measuring device for fast and precise checking of vibrating parts, machines and systems. This vibration meter uses the external vibration sensor to determine the vibration displacement (measuring range 0.000 ... 3.9 mm), the vibration velocity (measuring range 0.00 ... 399.9 mm/s) and the vibration acceleration (measuring range 0.0 ... 399.9 m/s²). Various measure-

ment parameters are available for the vibration meter, such as RMS, peak, peak-peak and crest factor. The vibration meter is equipped with a mode that allows a measurement to be automatically evaluated according to the limit values of ISO 10816-3.

ISO cal option

- » for mobile vibration measurement
- » measuring range up to 399.9 m/s² / 15744 in/s²
- » FFT analysis
- » route measurement
- » manual measured value memory
- » automatic ISO 10816-3 evaluation
- » internal memory
- » 2.48" LC display



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	Acceleration 0.0 ... 399.9 m/s² / 0.0 - 15744 in/s² 0.1 m/s² / 3.94 in/s² ±2 % 10 Hz ... 10 kHz 1 kHz ... 10 kHz
Resolution	
Accuracy @ 160 Hz	
Frequency range	
Measuring range	Velocity 0.00 ... 399.9 mm/s / 0.00 - 15.74 in/s 0.1 mm/s / 0.0039 in/s ±2 % 10 Hz ... 1 kHz
Resolution	
Accuracy @ 160 Hz	
Frequency range	
Measuring range	Rotational Speed 600 ... 50000 RPM
Resolution	
Accuracy @ 160 Hz	
Frequency range	
Measuring range	Displacement 0.000 ... 3.9 mm / 0.000 - 0.154 in 1 µm / 39.4 µin ±2 % 10 Hz ... 200 Hz
Resolution	
Accuracy @ 160 Hz	
Frequency range	
Measurement parameters	RMS, Peak, Peak-Peak Crest factor
Manual memory	99 folders with 50 measured values each
Data logger	Various start/stop triggers Measurement interval between 1 s ... 12 h 50 memory locations with 43.200 measured values each can be switched to metric / imperial
Units	2.48" LC display English, German, French, Spanish, Italian, Dutch, Portuguese, Turkish, Polish, Russian, Chinese, Japanese
Display	internal: LiPo battery (3.7 V, 2500 mAh) external: USB 5 VDC, 500 mA
Menu languages	ca. 15 ... 20 h (depending on display brightness) temperature: -20 ... +65 °C / -4 ... 149 °F humidity: 10% RH ... 95% RH, non-condensing
Power supply	165 x 85 x 32 mm / 6.5 x 3.3 x 1.3"
Operating time	239 g / 8.4 oz
Operating / storage conditions	
Dimensions	
Weight	

Sensor PCE-VT 3900	Sensor with spiral cable PCE-VT 3xxx SENSOR Magnet adapter PCE-VT VMH
Sensor PCE-VT 3900S	Sensor with spiral cable PCE-VT 3xxx SENSOR Needle sensor PCE-VT NP Handle PCE-VT 3xxx HANDLE

Technical Data Vibration Sensor	
Resonance frequency	24 kHz
Transverse sensitivity	≤ 5 %
Destruction limit	5000 g (peak)
Operating and storage temperature	-55 °C ... +150 °C / -67 °F ... 302 °F
Housing material	stainless steel
Mounting thread	¼ - 28"
Dimensions	Ø 17 x 46 mm / 0.67 x 1.8"
Weight (without cable)	52 g / 1.8 oz

Optional accessories:	
PCE-VT NP	Needle sensor
PCE-VT VMH	Magnet adapter
CAL-PCE-VT 3xxx	ISO Calibration Certificate
PCE-VT 3xxx SENSOR	replacement vibration sensor

Further models:	
PCE-VT 3950	incl. sensor, magnetic adapter, headset
PCE-VT 3950S	incl. needle sensor with handgrip, headset



Subject to changewithout notice

VIBRATION MEASUREMENT
VIBRATION ANALYZER

PCE-VT 1100 SERIES

Measurement of acceleration, vibration velocity and displacement

The vibration analyzer is used as a hand-held measuring device for the individual assessment of vibrations on machines and systems. With the help of this vibration analyzer, the actual state can easily be determined on site. Thus, corresponding changes can be made directly on site after the measurement. Thereafter, the new condition can be assessed. Thus, the vibration analyzer serves as a measuring

device for a relative measurement on different machines. The vibration analyzer serves essentially as precautionary or preventive maintenance of production machines. Very often, the vibration analyzer is used to assess the state of smaller electric motors.

ISO cal option

- » measures speed, distance, acceleration
- » keeps the value after every measurement
- » easy to handle, powered by batteries
- » wide frequency range
- » automatic shut-down after 20 seconds of inactivity to protect battery life
- » low battery indicator

PCE-VT 1100



PCE-VT 1100S

APPLICATION



TECHNICAL SPECIFICATIONS

Parameter	Measuring Range	Frequency Range
Acceleration	0.01 ... 199.9 m/s² peak	10 Hz ... 1 kHz
Vibration speed	0.01 ... 199.9 mm/s rms	10 Hz ... 1 kHz
Displacement	0.001 ... 1.999 mm p-p	10 ... 500 Hz
Measurement accuracy	Acceleration: ≤3 % Vibration speed: ±5 %, ±2 Digits Displacement: +10/-20 % (10...20 Hz); ±5 % (20...1000 Hz)	

General specifications

Display	LCD, Response time approx. 1 second
Power supply	2 x 6 V CR2032 button cell
Battery life	about 5 hours (in continuous operation)
Environmental conditions	0 ... +40 °C / 32 ... 104 °F, 0 ... 84 % r.H.
Dimensions	155 x 24 x 18.7 mm / 6.1 x 0.9 x 0.7"
Weight	ca. 40 g / 1.4 oz (incl. batteries)

Optional accessories::

Standard probe	length 10mm	Order no.:	PCE-VT-NF-10
Vibration Sensor	length 45 mm	Order no.:	PCE-VT-NF-45
1 point calibration at:	159.2 Hz; 10 mm/s; 14.1 m/s²; 0.028 mm	Order no.:	CAL-V-I

Model:

PCE-VT 1100	Vibration meter with sensor length 10 mm
PCE-VT 1100S	Vibration meter with sensor length 45 mm
PCE-VT 1100M	Vibration meter with magnetic adaptor plate

PCE-VT 1100M



Subject to change without notice

VIBRATION MEASUREMENT
VIBRATION METER

PCE-VM 20

Vibration meter for vibration measurement on machines

Rotating components in machines generally cause machine vibrations which can go over to the entire machine via mechanically coupled components. This creates a mixture of vibration with different frequencies. This machine vibration can have different effects some of which may be desired (e. g., in conveyors or vibrating sieves) – however, in most cases they are undesirable and cause poor manu-

facturing qualities and increased wear of the machine. Increased wear and tear due to machine vibrations leads to reduced running times, higher failure rates and higher maintenance expenditure, i. e. to avoidable costs as a whole.

ISO cal option

- » real-time FFT analysis
- » robust housing
- » many vibration parameters
- » integrated rechargeable LiPo battery
- » direct evaluation of machine vibration in compliance with DIN ISO 10816



APPLICATION



TECHNICAL SPECIFICATIONS

Vibration acceleration	0 ... 200 m/s², RMS and Peak-Peak
Vibration velocity	0 ... 200 mm/s, RMS
Vibration displacement	0 ... 2000 µm, Peak-Peak
Accuracy vibration	±5 %
Operating modes	vibration, temperature, revolutions
Representable measured variables	Frequency Vibration acceleration vibration velocity vibration FFT spectrum
Units	metric, imperial mm/s², mm/s, µm RPM und Hz
Interface	USB 2.0
Memory	4 GB micro SD card
Battery life	up to 8 h continuous operation
Battery type	lithium polymer
Display	128 x 160 pixel colour LCD
Environmental conditions	-10 ... +55 °C ≤80 % RH non-condensing
Dimensions	132 x 70 x 33 mm / 5.2 x 2.8 x 1.3 in (L x W x D)
Weight	approx. 150 g

Handset: must not be exposed to strong vibration, magnetic fields, corrosive media or dust

Technical data of the vibration sensor

Sensitivity	100 mV/g
Frequency response (± 3 dB)	0.5 ... 15000 Hz
Frequency response (± 10 %)	2.0 ... 10000 Hz
Dynamic range	±50 g, peak
Power supply (IEPE)	18 ... 30 V DC
Constant current source	2 ... 10 mA
Spectral noise at 10 Hz	14 µg / √Hz
Spectral noise at 100 Hz	2.3 µg / √Hz
Spectral noise at 1000 Hz	2 µg / √Hz
Output impedance	<100 Ω
Bias voltage	10 ... 14 V DC
Housing insulation	>100 MΩ
Environmental conditions	-50 ... 121 °C / -58 ... 249.8 °F
Maximum impact protection	5000 g, peak
Resonant frequency	23,000 Hz
Housing material	316L stainless steel
Connection	2-pin MIL-C-5015
Protection class	IP 68
Weight	90 g / < 1 lb



Subject to changewithout notice

VIBRATION MEASUREMENT
VIBRATION ANALYZER

PCE-VM 22

Vibration analyzer with 4 GB data memory / Measuring range 0 ... 200 mm/s²

The vibration analyzer has a measuring range of 0 ... 200 m/s² for acceleration. In addition to acceleration, the vibration meter can also measure speed, displacement, frequency and an ISO 18016-3 measurement. During the vibration measurement, an FFT view is simultaneously displayed on the vibration meter. By pressing a button, it is possible to switch from the FFT analysis to the actual wave view of the

vibration. This makes it possible to analyse and evaluate a vibration even better with the vibration meter. The magnetic holder of the vibration sensor of the vibration meter is designed in such a way that it can be attached to curvatures with a minimum radius of 20 mm / 0.78".

ISO cal option

- » measuring range 0 ... 200 m/s²
- » infrared temperature measurement
- » 4 GB data storage
- » 8 hours of battery life
- » optionally with ISO calibration certificate
- » FFT analysis and wave view of the vibration



APPLICATION



TECHNICAL SPECIFICATIONS

Frequency	
Measuring range	1 ... 10,000 Hz
Resolution	0.1 Hz
Accuracy	±5 %
Acceleration	
Measuring range	0 ... 200 m/s²
Resolution	0.01 m/s²
Accuracy	±5 %
Speed	
Measuring range	0 ... 200 mm/s
Resolution	0.01 mm/s
Accuracy	±5 %
Displacement	
Measuring range	0 ... 2000 µm
Resolution	0.01 µm
Accuracy	±5 %
Infrared temperature measurement	
Measuring range	-70 ... 380 °C / -94 ... 716 °F
Resolution	0.1 °C / °F
Accuracy	±0.5% at (0...+60°C), (32 ... 140 °F)±1 % at (-40 ... 0, 60 ... 120 °C), (-40 ... 32, 140 ... 248 °F) ±2 % at (-70 ... -40, 120 ... 180 °C), (-94 ... -40, 248 ... 356 °F) ±4 % at (180 ... +380 °C), (356 ... 716 °F)
Emissivity	1 fixed
Tachometer	
Measuring range	10 ... 200,000 RPM
Resolution	0.1 RPM
Accuracy	±0.1 % and ±1 RPM
Units	RPM, Hz
Further specifications for the handheld device	
FFT spectrum resolution	400, 800, 1600 lines
Dynamic range	106 dB
A/D converter resolution	24 bit
Storage space	4 GB
Display	128 x 160 pixels
Interfaces	Micro USB interface
Power supply battery	3.7 V, 1000 mAh battery
Battery life	ca. 8 hours
Power supply for power pack	5 V DC, 1 A
Operating conditions	0 ... 50 °C / 32 ... 122 °F, <85% RH, non-condensing
Storage conditions	-20 ... 60 °C / -4 ... 140 °F, <85% RH, non-condensing
Dimensions	132 x 70 x 33 mm / 5.2 x 2.7 x 1.3"
Weight	150 g / 5.3 oz
Vibration sensor specifications	
Sensitivity	100 mV/g
Cable length	approx. 1.5 m / 4.9 ft
Connection	2 pin MIL-DTL-5015
Case material	316L stainless steel
Dimensions	Ø 25 x 53 mm / Ø 0.98 x 2.08"
Weight	86 g / 3.0 oz
Magnetic holder specifications	
Diameter	30 mm / 1.18"
Magnetic force	20 kg / 44 lbs
Connection thread	1/4"-28 UNF female
Smallest radius	20 mm / 0.78"
Infrared and RPM sensor specifications	
Cable length	ca. 1.2 m / 3.9 ft
Dimensions	Ø 16 x 83 mm / Ø 0.63 x 3.26"
Weight	75 g / 2.6 oz



Subject to changewithout notice

VIBRATION MEASUREMENT

VIBRATION METER

PCE-WVS 50

Diagnostics of rolling bearings by crest factor / 3 parameters of vibration

A distinctive feature of the accelerometer is the ability to work in the following modes: Classic vibrometer - means using the device as an indicator of the overall vibration level, measuring peak values, displacement or diagnosing rolling bearings using the crest factor. As a result, the accelerometer displays the current and the average value. The duration of the averaging of the vibration values can be

individually adjusted on request. This mode is useful for daily monitoring of equipment: pumps, gearboxes, electric drives and turbochargers, including individual units of rotating equipment and the entire unit as a whole, providing a general understanding of the vibrational state of industrial equipment at the enterprise.

ISO cal option

- » vibration velocity, vibration acceleration and vibration displacement
- » with magnetic holder
- » display OLED
- » high measurement accuracy
- » standard USB Type-C charging port
- » built-in rechargeable battery
- » USB Type-C charging port
- » Bluetooth 5.2 connectivity (option)



APPLICATION



TECHNICAL SPECIFICATIONS

Vibration velocity	0.01 ... 200 mm/s
Vibration acceleration	0.1 ... 200 m/s²
Vibration displacement	2 ... 2000 µm
Frequency range	10 ... 1000 Hz
Accuracy	±5 %
Protection class IP	Sensor IP 54
Power supply	Li-pole battery, 3.7 V; 370 mAh
Battery life	of the sensor depending on the intensity of the work 4 - 8 h
Interface	USB, type C, Bluetooth LE 5.2
Operating time	approx. 8 h
Charging time	1.5 h
Environmental conditions	-10 ... +55 °C, <85 % r.h.
Overall dimensions (with magnetic attachment)	30 x 28 x 90 mm
Display	OLED 0.91"
Weight	70 g



Subject to change without notice

VIBRATION MEASUREMENT
VIBRATION METER

PCE-VDL 24I

3-axis acceleration up to 1600 Hz

The acceleration sensor of this 3-axis data logger has a sampling rate of 1600 Hz. The sensor measures the current acceleration (3 axes), for instance in case of a shock or vibration. The measurements are made in pre-set (selectable) time intervals. The data measured with the internal 3-axis acceleration sensor are saved to a 32 GB memory card. This makes the data logger perfectly suitable to determine the acce-

leration for the purposes of fault diagnostics / stress test of components, machine monitoring, shock measurements and preventive maintenance in general.

ISO cal option

- » 3-axis acceleration up to 1600 Hz
- » 32 GB SD memory card
- » compact design: 86.8 x 44.1 x 22.2 mm
- » country of origin Germany



APPLICATION



TECHNICAL SPECIFICATIONS

Parameter 3-axis acceleration	
Measurement range	±16 g
Accuracy	±0.24 g
Sampling rate	1600 Hz ... 1 Hz
General technical data of the 3-axis acceleration sensor	
Memory capacity	2.5 readings per measurement, 3.2 billion readings with included 32 GB microSD memory card
Keys	start / stop of a measurement; data logger on / off
LED	Log: operating status Alarm: alarm indicator Charge: charging status USB: status of PC connection
Power supply	integrated rechargeable Li-Ion battery 3.7 V / 500 mAh The meter is charged via the USB interface.
Integrated sensors	3-axis acceleration
Interface	USB
PC software	setup and evaluation software included 10 32 bit / 64 bit) to record and evaluate data
Operating conditions	temperature -20 ... +65 °C
Storage conditions	temperature +5 ... +45 °C (ideal storage conditions for battery) 10 ... 95 % RH, non-condensing
Standards	complies with EU regulation RoHS/WEEE
Weight	approx. 60 g
Dimensions (L x W x H)	87 x 44 x 23 mm
Optional accessories:	
Mounting plate	Order code PCE-VDL MNT



Subject to changewithout notice

PCE-S 42

Machine stethoscope to listen to bearings and motors / 32 sound levels

The automotive-testing mechanics stethoscope PCE-S 42 is designed for listening to individual machine parts, which enables you to carry out maintenance and repair work using the machine stethoscope. The use of a machine stethoscope thus makes it easier to listen to sound phenomena in bearings and motors. This makes it possible to amplify noises that imply that the machine is slightly damaged,

which can cause severe impairments and damage to the machine if not observed. The machine stethoscope comes with headphones the shape of which is adapted to the human head and thus are perfectly suitable to be used in noisy environments. The big, padded earpieces have a noise-suppressing effect and at the same time offer wearing comfort.

ISO cal option

- » two different measuring tips
- » non-stationary measuring device
- » 32 volume levels
- » headphones adapted to the human head
- » for preventive maintenance and servicing
- » noise-suppressing headphones



APPLICATION



TECHNICAL SPECIFICATIONS

Frequency range	30 Hz ... 15 KHz
Operating temperature	-10 ... +40 °C
Output volume	digitally adjustable (32 levels)
Headphones	32 Ω
Power supply	4 x AAA battery
Battery life	30 h
Dimensions	220 x 35 x 35 mm
Length sensors	70 / 280 mm



Subject to changewithout notice

HARDNESS TESTING
HARDNESS TESTER

PCE-2900

For metallic materials / Measuring range 170 ... 960 HLD

The hardness tester PCE-2900 has been developed for hardness measurements on metallic materials. The hardness tester measures the material hardness in Vickers, Brinell, Rockwell, Leeb and Shore. The hardness tester PCE-2900 measures the hardness according to the Leeb rebound principle. An impactor bounces on the workpiece via a firing pin and the metal hardness is measured via the rebound.

The PCE-2900 hardness meter is equipped with a backlit colour display. Likewise, the buttons on the PCE-2900 are illuminated. Thus, the display can be read well even in low light conditions. The impact device is connected to the hardness tester via a cable.

ISO cal option

- » USB and WiFi for data transmission
- » large, bright touch-screen LCD display
- » large measuring range
- » measurement possible in every position
- » hardness scales (HRC, HRB, HV, HB, HS)
- » for all metallic materials



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	170 ... 960 HLD
Reproducibility	±6 HLD
Impactor	Type D
Measuring direction	360 °
Adjustable scales	Leeb, Brinell, Rockwell A, Rockwell B, Rockwell C, Vickers, Shore
Surface quality Ra of the workpiece	2 µm
Minimum weight of the workpiece	direct measurement: 5 kg / 11 lbs tied measurement: 2 ... 5 kg / 4.4 ... 11 lbs with coupling gel: 0.05 ... 2 kg / 0.1 ... 4.4 lbs
Minimum thickness of the workpiece	direct measurement: >5mm / >0.19 in with coupling gel: 0.8 ... 5 mm / 0.03 ... 0.19 in
Display	Colour LCD
Internal measured value memory	600 records in 6 files
Interface	USB, WiFi
Power supply	2 x 1.5 V AA batteries
Operating time	approx. 50 hours
Operating conditions	10 ... 50 °C / 50 ... 122 °F max. 90 % r.H.
Storage conditions	-30 ... 60 °C / -22 ... 140 °F max. 90 % r.H.
Dimensions	160 x 80 x 35 mm / 6.3 x 3.1 x 1.3 in
Weight	350 g / < 1 lb

Optional accessories:

Adaptor spherical inside HK11-13	Order no.: HK11-13
Adaptor spherical inside HK12.5-17	Order no.: HK12.5-17
Adaptor spherical inside HK16.5-30	Order no.: HK16.5-30
Adaptor spherical inside HZ11-13	Order no.: HZ11-13
Adaptor concave inside HZ12.5-17	Order no.: HZ12.5-17
Adaptor concave inside HZ16.5-30	Order no.: HZ16.5-30
Adaptor convex outside Z10-15	Order no.: Z10-15
Adaptor convex outside Z25-50	Order no.: Z25-50
Adaptor convex outside 14,5...30mm	Order no.: Z14.5-30
Adapter set for hardness testers with Impact D impactor	Order no.: PCE-HAK
Impact Sensor C	Order no.: PCE-2000N Probe C
Impact Sensor D	Order no.: PCE-2000N Probe D



Subject to changewithout notice

BELT TENSION TESTING
BELT TENSION METER

PCE-BTM 2000A

To measure the tension of V-belts or drive belts


The PCE-BTM 2000 is a measuring instrument to determine the tension of V-belts or drive belts. Belt tension can only be measured when the belt is not in operation. A small impulse with the help of a beater is enough to make the belt vibrate. With a measuring probe and a sensor beam, the generated vibration frequency is determined. The belt tension is calculated on the basis of the measuring data of

the natural frequency as well as the belt mass and the length of the free belt span. It is not necessary to enter the belt mass and the belt length. The maximum service life of V-belts or drive belts can only be achieved with ideal tension.

ISO cal option


- » measures vibration frequency of the belt
- » intuitive operation
- » calculation of belt tension (trum force)
- » displays belt tension in N
- » 6 menu languages
- » memory for 750 readings
- » sensor with gooseneck
- » belt length and belt mass can be entered

APPLICATION

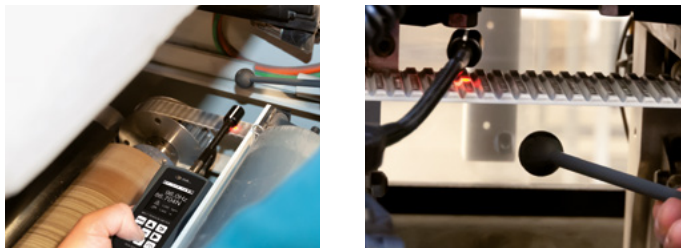

TECHNICAL SPECIFICATIONS

Measurement range	10 ... 900 Hz
Accuracy	±(1 % of Rd + 4 digits)
Repeatability	±1 Hz
Resolution	<100 Hz: 0.1 Hz >100 Hz: 1 Hz
Sensor length	16 cm / 6,2 in
Belt length	max. 9.999 m
Belt mass	max. 9.999 kg/m
Memory	750 readings 15 folders, 50 measuring points/folder
Menu languages	English, German, Spanish, French, Italian, Dutch
Power supply	3 x 1.5 V AA battery
Operating conditions	0 ... 50 °C; max. 95 % RH
Storage conditions	-20 ... 65 °C; max. 95 % RH
Dimensions	150 x 80 x 38 mm
Weight	approx. 200 g incl. batteries
Further Model: PCE-BTM 2000L	Sensor length 25 cm / 9,8 in

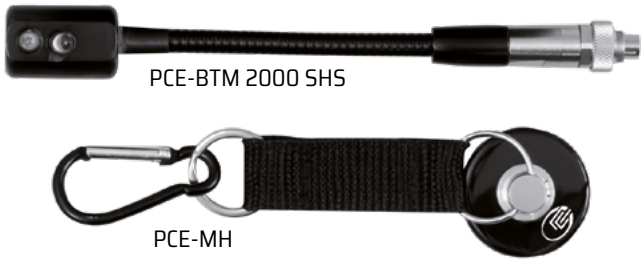

Subject to changewithout notice

RPM MEASUREMENT
STROBOSCOPE

PCE-LES 103

LED tachometer with a range of 60 ... 300.000 flashes

The LED stroboscope PCE-LES 103 combines LED technology with intelligent and compact electronics for precise control of the flash frequency. The mobile handheld stroboscope is particularly suitable for non-contact measurement and visualisation of movements on machines and systems. The frequency of the PCE-LES 103 can be continuously adjusted between 1 and 5000 Hz (60 - 300,000 flashes

per minute). The high-power LEDs used ensure a particularly long service life of the light sources. At 6,000 flashes per minute and a distance of 30 cm, the stroboscope achieves an illuminance of 2,900 lux. A long operating time is achieved by the large Li-ion battery.

ISO cal option

- » brightness: 3 High Power LEDs
- » flash frequency up to 300.000 FPM
- » 6160 lux at 30 cm / 1000 Hz
- » adjustable flash duration and phase shift
- » phase shift: -360° to +360°
- » automatic shutdown



APPLICATION



TECHNICAL SPECIFICATIONS

Display Type	TFT Color Display	Batteries and Accumulators	
Display Size	2.8 inches	Type	Lithium-Ion Battery
Operating Time	4.5 hours	Lithium Info	Lithium in the product (built-in or included)
Additional Information	at flash frequency 100 Hz, 1%, display brightness 70%	Capacity	2200 mAh
		Voltage	7.4 V
Adjustable Auto Shutdown	2 ... 10 min.	System Number	Secondary: Rechargeable Battery / Accumulator 1
Auto Shutdown Deactivatable	Yes	Further Models:	
Brightness	11730 lux @ 20cm @ 1000Hz 1% 6160 lux @ 30cm @ 1000Hz 1% 2650 lux @ 50cm @ 1000Hz 1%	PCE-LES 103UV-365	3 high power UVA LEDs UVA light 365 ... 370 nm
Light Color	6500 K	PCE-LES 103UV-385	3 high power UVA LEDs UVA light 380 ... 390 nm
Phase Shift	-360 ... 360 °		
Pulse Width	0.01 ... 1% of pulse duration Resolution: 0.01% 0.01 ° ... 3.60 ° of 360 ° Resolution: 0.01 °		
Menu Language	German, English, Spanish, French, Italian, Dutch, Turkish, Polish, Russian, Chinese		
Protection Class (Device)	IP52		
Power Supply	5V DC, 2A		
Weight	284 g		
Dimensions (L x W x H)	165 x 90 x 35 mm / 6,4 x 3,5 x 1,3 in		
Operating Conditions	-20 ... 60 °C, 35 ... 85% r.H		
Storage Conditions	-20 ... 60 °C, 35 ... 85% r.H		
Instruction Manual Languages	German, English		
Frequency			
Measurement Range	+60 FPM ... +9999.99 FPM		
Resolution	0.01 FPM		
Accuracy	0.001%		
Frequency			
Measurement Range	+10000 FPM ... +300000 FPM		
Resolution	0.1 FPM		
Accuracy	0.001%		
Frequency			
Measurement Range	+1 Hz ... +5000 Hz		
Resolution	0.01 Hz		
Accuracy	0.001%		



Subject to changewithout notice

OPTICAL MEASUREMENT

LUX METER

PCE-LMD 5

Units: lux, footcandle / Micro-USB interface

The lux meter has a large measuring range of 0 ... 400 lux. The illuminance is measured using an external silicon photodiode with a spectral filter. This means that the lux meter can be positioned appropriately for every measuring task. The measured values can be displayed by the lux meter in lux and in footcandles. In addition to the normal measured value display on the lux meter, the measured value

is also displayed on a scale. The lux meter has additional functions so that an analysis of the illuminance can be carried out. With the additional functions of the lux meter, the largest and smallest measured value can be output using the "MIN" and "MAX" buttons.

ISO cal option

- » rechargeable battery
- » micro USB interface
- » measuring range 0 ... 400 kLux
- » lux and footcandle units
- » LCD display with backlight



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	1000 ... 400,000 Lux 0.0 ... 999.9 Lux
Resolution	1 Lux 0.1 Lux
Measuring range (footcandle)	1000 ... 400,000 fc 100 ... 999 fc 0.00 ... 99.00 fc
Resolution	1 fc 1 fc 0.01 fc
Accuracy	±5 % of measured value ±10 digits with standard light A ±10 % of measured value ±10 digits
Repeatability	±2 %
Sampling rate	4 Hz
Sampling rate peak hold	10 µs
Sensor	silicon photodiode with spectral filter
Battery status display	battery symbol appears, when the battery voltage is too low.
Interface	Micro-USB (only for charging)
Power supply battery	5 V DC, 1 A
3.7 V Li-Ion battery	-10 ... 50 °C / 14 ... 122 °F / <80 % RH, non-condensing
Power supply USB	-20 ... 50 °C / -4 ... 122 ° / <80 % RH, non-condensing
Operating conditions	meter: 162 x 88 x 32 mm / 6.4 x 3.5 x 1.3" sensor: 102 x 60 x 25 mm / 4 x 2.4 x 1" approx. 320 g / 11.3 oz
Storage conditions	
Dimensions	
Weight	
Further model:	
PCE-LMD 10	with data storage 32,000 measurement sets



Subject to changewithout notice

OPTICAL MEASUREMENT

LUX METER

PCE-LMD 200

Lux Meter class A according to DIN 5032-7 / data logger with 8 GB measured value memory

The lux meter is a precise measuring instrument that meets the highest demands for light measurements. In accordance with DIN 5032-7, it fulfils the requirements of precision class A, which enables accurate and reliable detection of light intensities. With an impressive measuring range of 0.000 lux to 500,000 lux, the lux meter is extremely versatile.

Whether for lighting control at the workplace, in exhibitions or outdoors - the lux meter covers a wide range of applications. Accuracy class A not only ensures precise measurements, but also high reproducibility of the results. This is particularly important in applications where accurate light measurements are crucial.

ISO cal option

- » precision according to DIN 5032-7
- » large measuring range: 0.000 lx ... 500 klux
- » accuracy class: A
- » external sensor
- » 8 GB measured value memory
- » battery operation



APPLICATION



TECHNICAL SPECIFICATIONS

Lux	
Measurement range	0 ... 500 000 lx (500 klx)
Resolution	0,001 lx @ 0 ... 50 lx 0,1 lx @ 50 ... 5 klx 0,01 klx @ 5 ... 500 klx
Accuracy	Total error ≤ 2.0% (CIE, DIN 5032-7) Class A @ 10 ... 40 °C
General technical data	
Units	lx, klx
Display type	LCD
Display refresh rate	1 x per second
Storage medium	Micro-SD card
Memory interval of	1 s
Memory interval up to	60 s
Memory capacity	8 GB
Interface	Micro-USB
Standard(s)	DIN 5032-7, ISO/CIE 19476, EN 12464-1, EN 12464-2, EN 12665
Operating time	23 h
Measurement rate	1 Hz
Classification	A (CIE, DIN 5032-7)
Menu language	English, Polish
Protection class (appliance)	IP20
Power supply	5V DC / max. 2,1A
Weight	172 g
Device weight with delivery	1,67 kg
Equipment weight with scope of delivery and outer packaging	1,71 kg
Dimensions (L x W x H)	118 x 74 x 21 mm
Other dimensions	Probe dimensions: Ø 44 x 25 mm
Extension rod: approx. 1 metre	
Operating conditions	-20 ... 50 °C , 90 % r.H.
storage conditions	-20 ... 50 °C , 90 % RH
Languages of the instructions	English

Further Model:

PCE-LMD 200-LD-KIT
incl.luminance accessory



Subject to changewithout notice

OPTICAL MEASUREMENT
LIGHT METER

PCE-UV 40A

Simultaneous measurement of UVA and light

The light measuring device / lux meter is a highly developed instrument that is characterized by its versatility and precision. With its dual measurement channels, the light measuring device / lux meter enables the simultaneous measurement of UV-A radiation and visible light. The external sensor allows the light measuring device / lux meter to


be positioned flexibly to carry out precise measurements in different locations. This function is helpful, for example, when measuring UV lights for material testing according to the standards "EN ISO 9934-1 Non-destructive testing with magnetic powder" and "EN ISO 3059 Non-destructive testing, penetrant testing and magnetic particle testing

ISO cal option

- » two-channel measuring device UV-A and visible light
- » external sensor
- » simultaneous measurement
- » two UV-A measuring ranges up to 100 W/m²
- » control of UV lights for material testing
- » automatic measuring range changeover 0 lx ... 10 klx
- » accurate measurement of illuminance regardless of lamp type
- » measured value memory



APPLICATION



TECHNICAL SPECIFICATIONS

Light	
Measuring range	0 lx ... 10 klx
resolution	0.1 lx
accuracy	f1 ≤ 3 %
UV	
Measuring range	0 W/m² ... +100 W/m²
resolution	0.01W/m²
accuracy	According to EN ISO 3059 V(λ) CIE
Δλ1/10 320 - 395nm	
Δλ1/2 337 - 385nm	
λmax 365nm	
Sλ=313nm < 5%	
Sλ=405nm < 0.5%	
General technical data	
Display type	LCD with lighting
Storage medium	Internal memory
Storage capacity	20 records
interface	Mini USB
Norm(s)	ISO/CIE 19476, EN ISO 3059, EN ISO 9934
Measuring rate	1Hz
Menu language	English, Polish
Protection class (device)	IP20
Weight	148g / 0.3 lbs
Device weight with scope of delivery	1198g / 2.6 lbs
Device weight including scope of delivery and outer packaging	1377g / 3 lbs
Dimensions (L x W x H)	118 x 72 x 20 mm / 4.6 x 2.8 x 0.8 in
Other dimensions	Probe Ø 44 x 25.5 mm
Cable length probe	1.5 m / 4.9 ft
Extension rod	460 mm / 18.1 in
Operating conditions	-10 ... 50 °C / 14 ... 122 °F, 0 ... 90 % RH
Storage conditions	-10 ... 50 °C / 14 ... 122 °F, 0 ... 80 % RH
Languages of the instructions	English



Subject to changewithout notice

OPTICAL INSPECTION RIGID INDUSTRIAL BORESCOPE

PCE-RS 40

Working length of 175 or 432 mm (6.9 or 17 in) / Diameter only 4 mm

Rigid borescope for visual inspection in small and narrow holes and cavities. With a diameter of 4 mm and a length of 175 or 432 mm / 6.9 or 17 in ,this rigid borescope is very versatile. The integrated LED lamp allows for a very good illumination of cavities to be inspected. For image transmission, this rigid borescope uses a lens system with a field of view of 45°. The rigid borescope is robust and designed for

industrial environments. This rigid borescope provides very high resolution images with high sharpness. A mirror attachment is available as an option on this rigid borescope. The rigid borescope is very well suited for inspections of small objects.

ISO cal option

- » diameter only 4 mm / 0.16 in
- » LED bulbs
- » working length 175 or 432 mm / 6.9 or 17 in
- » extremely robust
- » high resolution
- » battery operation



APPLICATION



TECHNICAL SPECIFICATIONS

Effective length	175 or 432 mm / 6.9 or 17 in depending on model
Diameter	4 mm / 0.16 in
Field of view	45 °
Lighting	LED
Power supply	3.7 V Li-Ion battery (rechargeable)

Optional accessories:

Mirror for Rigid Borescope	Order no.:	ES-45-RS40-175
Mirror for Rigid Borescope	Order no.:	ES-45-RS40-432

Further model:

PCE-RS 27	Effective length	175 mm
	Diameter	2,7 mm

Optional accessories:

Mirror ES-45-RS 27 for endoscope	Order no.:	ES-45-RS 27
----------------------------------	------------	-------------



Subject to changewithout notice

OPTICAL INSPECTION
INDUSTRIAL BORESCOPE

PCE-VE 200 SERIES

Videoborescope for NDT machine diagnostics / Ø 4.5 mm or Ø 3.7 mm

The video borescope PCE-VE 200 is a nondestructive inspection camera. Thus, the video borescope is an ideal tool for diagnosing hard-to-reach areas. For example, the areas of mechanical engineering, plumbing and heating, and the entire construction / building industry are among the main application fields of the video borescope. Also, the video

borescope is suitable for the use in the automotive industry. The fact that it has a one-meter camera tube makes it possible to use the video borescope in a way that in many cases no disassembly of machines or motors is necessary. There are bright LEDs on the camera head that can be controlled and adjusted by the user via the device.

ISO cal option

- » 4.5, 3.7 and 10 mm cable diameter
- » 3.5 " display
- » brightness adjustable on the camera head
- » 2600 mAh battery
- » SD card slot for micro SD card



APPLICATION



TECHNICAL SPECIFICATIONS

Display	3.5" LCD
Resolution	video function AVI (640 x 480)
Resolution	image function JPEG (1600 x 1200)
Image rotation	180 ° rotation and mirror function
Freeze-function	yes
Zoom	up to 4 x
Memory	Micro SD card
Menu languages	German, English, Spanish, French, Russian, Japanese, simplified Chinese, traditional Chinese
Interfaces	Micro USB 2.0, TV output, Micro SD card slot
TV output	PAL
Power supply	Li-Ion battery
Battery capacity	2600 mAh
Operating conditions	-10 ... +40 °C, RH <75 %

Cable specifications (only for PCE-VE 200 and PCE-VE 200-S)

Cable diameter	depends on the model 4.5 mm / 0.177 in (PCE-VE 200), 3.7 mm / 0.14 in (PCE-VE 200-S)
Image sensor	1/8" CMOS chip
Resolution camera	640 x 480 pixels
Illumination of the cam.	6 white LEDs (intensity can be adjusted)
Field of view or angle	90 °
Field of view depth	15 mm / 0.59 in... 100 mm / 3.93 in
Camera tube length	1 m
Push-cable	semi-flexible (semi-rigid spiral)

Operating temperature:

main unit / probe	in the air:	-10 ... +50 °C / +14 ... +122 °F
	in water:	+5 ... +50 °C / +41... +122 °F
Relative humidity	probe and device	15 ... 90 %
Fluid resistance	probe / device	machine / light oil, saline solution 5 %
Intrusion protection	probe	water, oil, dust, protection IP67
	Main unit	rain in windy weather (battery compartment must be closed) not under
	water	

Model	Cable diameter	Cable length
PCE-VE 200	4,5 mm	1 m
PCE-VE 200-S	3,7 mm	1 m
PCE-VE 200-S3	3,7 mm	3 m
PCE-VE 200UV	10 mm	1 m

Optional accessories:

PCE-VE 200-SCSV3	Camera cable with front and side, camera 9 mm, length: 3 m
PCE-VE 200-SCSV1	Camera cable with front and side, camera 9 mm, length: 1 m
PCE-VE 200-SCSV2	Camera cable with front and side, camera 6 mm, length: 1 m
PCE-VE 200-SCS3	Camera cable 3.7 mm, length: 3 m
PCE-VE 200-SCS1	Camera cable 3.7 mm, length: 1 m
PCE-VE 200-SC	Spare camera cable 4,5 mm, length: 1 m



Subject to change without notice

OPTICAL INSPECTION
INSPECTION CAMERA

PCE-VE 270HR

Battery-operated inspection camera with 2.8 mm diameter

The inspection camera gives you new, visual insights into the interior of motors and systems. The inspection camera is the ideal tool for maintenance and repair in workshops or industrial companies. Optical analysis with an inspection camera has never been so easy. Guide the flexible cable through a hole or a cavity near the point to be inspected and look at everything on the display a the inspection camera. Thanks

to the flexible guidance, the low weight and the excellent optics, you can use this inspection camera to identify weak spots and problem areas very easily and early and thus take preventive measures without having to carry out complex disassembly first.

ISO cal option

- » 2 m / 6.56 ft cable length
- » 2.8 mm / 0.11 in cable diameter
- » storage function on micro SD card
- » LED light
- » 0 ° viewing angle
- » miniature probe cable with 90° viewing angle option



APPLICATION



TECHNICAL SPECIFICATIONS

Cable length	2 m / 6.56 ft
Cable type	Flexible
Cable diameter	2.8 mm / 0.11 in
Protection class	IP 67
Field of view depth	5 ... 50 mm / 0.2 ... 1.98 in
Field of view	120 °
Perspective	0 °
Lighting	4 LEDs
Exposure	Automatically
Anti-reflection coating	Automatically
Image sensor	1/18" CMOS
Camera resolution / image sensor	400 x 400 px
Display	5" TFT screen
Interface	Micro USB, HDMI
Memory option	Image and video
Memory	Micro SD memory card (incl.)
Picture format	JPEG (400 x 400 Px)
Video format	MP4 (400 x 400 Px)
Video output	HDMI
Menu languages	German, English, Chinese, Spanish, Portuguese, French, Russian, Japanese, Korean
Operating and storage temperature	-10 ... 50 °C / 14 ... 122 °F
Power supply	3.7 V Li-ion battery, 5200-mAh
Battery life	Min. 6 h
Dimensions	200 x 130 x 58 mm / 7.9 x 5.1 x 2.3 inch
Weight	595 g / 1.3 lb

Optional accessories:

PCE-VE 270HR-PROBE	Spare endoscope cable
--------------------	-----------------------

PCE-VE 270HR-2,1-PROBE	Endoscope cable extremely thin
------------------------	--------------------------------

PCE-VE 270HR-SV-PROBE	Endoscope cable with lateral camera
-----------------------	-------------------------------------



Subject to changewithout notice

OPTICAL INSPECTION
WIFI INSPECTION CAMERA

PCE-VE 500N

WiFi inspection camera for Android and iOS / camera head Ø 4.5 mm

The WiFi inspection camera can be connected to a tablet or smart-phone using the Android or iOS app. The WiFi borescope impresses with its simple handling and its robust construction. With the flexible, metal braided borescope cable, examinations under adverse operating conditions are possible with the WiFi borescope. The cable and head diameter is only 4.5 mm. The camera head of the WiFi borescope

can be swiveled by 180°. This enables use in narrow cavities and visibility in almost all directions. 5 LEDs ensure that the areas and cavities to be examined are very well illuminated by the WiFi borescope. The brightness of the lighting can be adjusted in stages via the app. Images and videos can be saved in the WiFi borescope app.

ISO cal option

- » image transmission via WiFi
- » for iOS and Android
- » memory for pictures and videos via app
- » movable camera head Ø 4.5 mm
- » cable length 1 m (flexible)
- » 5 LEDs with adjustable light intensity



APPLICATION



TECHNICAL SPECIFICATIONS

Cable length	1000 mm / 3 ft 3"
Cable type	flexible, metal braided camera head swivels 180 °
Cable diameter	4.5 mm
Protection class	IP 67
Field of view depth	10 ... 100 mm
Field of view	90 °
Perspective	0 °
Lighting	5 LEDs dimmable via app
Exposure	automatic
Anti-reflection	automatic
Camera resolution / image sensor	1024 x 768 Px
Interface	USB-C charging socket 5 V / 1 A WIFI IEEE 802,11 b/g/n 2.4 GHz
Memory option	image and video
Memory	via iOS or Android device
Image format	JPEG (1024 x 768 Px)
Video format	MP4 (1024 x 768 Px)
Menu navigation	graphically in App
Operating and storage temperature	-10 ... +60 °C / 14 ... 140 °F (borescope cable) 0 ... 40 °C / 32 ... 104 °F (hand piece)
Power supply	3.7 V Li-Ion battery, 2600 mAh
Operating time	min. 4 h
Recharge time	2 h
Dimensions	207.5 x 35 x 50 mm / 8.1 x 1.3 x 1.9"
Weight	248 g / 8.7 oz



Subject to changewithout notice

PCE-VE 800N4

4-way camera head / data storage / diameter 2.8 mm

The inspection camera has a 1.5 m / 4.9 ft long borescope cable. With a diameter of only 2.8 mm, cavities with the smallest access can be viewed with the help of this inspection camera. The camera head of the inspection camera can move freely in 4 directions. Especially in the maintenance of engines, turbines, etc., the high-resolution display of the inspection camera offers a good view of cavities and hard-to-

reach places. The moveable camera has a resolution of 400 x 400 pixels. The field of view is 80°, which means that with a relatively short distance to the object to be inspected, very large images can still be taken with the inspection camera. All recordings of the inspection camera can be saved as an image or video.

ISO cal option

- » 2.8 mm camera head
- » 1.5 m / 4.9 ft borescope cable
- » 4-way camera
- » 5 " monitor
- » image and video memory
- » IP 58 camera cable
- » 400 x 400 pixel image resolution
- » 5 ... 50 mm focus distance



APPLICATION



TECHNICAL SPECIFICATIONS

Cable / head diameter	2.8 mm
Direction of movement camera head	4-way
Length of camera head	8 mm
Bending radius	7 mm
Camera head material	Titanium alloy
Camera lens material	Glass
Perspective	80 °
Line of sight	0 °
Focus area	5 ... 50 mm
Image sensor	1/18" color
Trigger	160000 pixels
Refresh rate	30 Hz
Borescope cable length	1.5 m / 4.9 ft
Borescope cable material	Tungsten
Degree of protection borescope cable	IP 58
Operating conditions	Main unit: 0 ... 45 °C / 32 ... 113 °F, 15 ... 90 % RH Cable: 0 ... 60 °C / 32 ... 140 °F
Display	LCD 5" 16 : 9 display
Interface	Micro USB
Video output	HDMI
Memory	SDHC memory card up to 64 GB
Power supply	Li-Ion battery 3550 mAh 5 V power supply
Dimensions	33.5 x 14.5 x 8 cm
Weight	Approx. 700 g / 1.5 lbs

Further models:

PCE-VE 400N4	ø 4 mm
PCE-VE 900N4	ø 2 mm



Subject to changewithout notice

OPTICAL INSPECTION INDUSTRIAL BORESCOPE

PCE-VE 1000

A Versatile 2-way Inspection Instrument

The endoscope PCE-VE 1000 is a versatile inspection instrument. Various endoscope cables with different properties can be connected to the endoscope.

A particular advantage of the endoscope is the large display, which due to its dimensions and resolution offers the user the best possible overview of the surface to be inspected. The endoscope allows the

recording of pictures and videos, whereby the videos are additionally stored with an audio recording.

The clear resolution is also good when via button pressing the images are stored on the SD card, inserted in the endoscope. When the SD card is read out on the computer, the recorded pictures and videos are clearly displayed.

ISO cal option

- » various endoscope cables are selectable and are optionally available
- » storage of images and videos
- » 8 GB memory card incl.
- » LED lighting
- » large 7 " LC display



APPLICATION



TECHNICAL SPECIFICATIONS

Screen	7"
LCD	800 x 480 pixels
Photo resolution / format	640 x 480 pixels / JPEG
Video resolution / format	640 x 480 pixels / MPEG(with sound)
Drop test	1 m / 3.3 ft fall
Power supply	Li - on battery
Interface	USB
Memory	Accommodates SD cards up to 32 GB
AV output	NTSC / PAL
Audio input	Built - in microphone
Brightness setting	Adjustable, 10 levels
Run time per battery charge	5 hours
Charging time battery	3 hours
Charging temperature	10 ... 40 °C / 50 ... 104 °F
Operating temperature	0 ... 60 °C / 32 ... 140 °F
Storage temperature	0 ... 60 °C / 32 ... 140 °F
Protection class	IP 57
Dimensions	240 x 154 x 47 mm / 9.4 x 6 x 1.8 in
Weight	1.3 kg / 2.9 lbs

Optional accessories:

Two-Way Articulating Camera Cable	PCE-VE-2W3-HR
Four-Way Articulating Camera Cable	PCE-VE-4W3-HR
Four-Way Articulating Camera Cable	PCE-VE-4W1-HR
Two-in-One Semi-Flexible Camera Cable	PCE-VE-2in1-N
Semi-rigid borescope cable HighRes	PCE-VE-N-SC1-HR
Semi-Flexible Camera Cable	PCE-VE-N-SC2
Semi-Flexible Camera Cable	PCE-VE-N-SC1
Semi-Flexible Camera Cable	PCE-VE-N-SC30
Flexible Camera Cable	PCE-VE-N-SC10
Flexible Borescope Cable	PCE-VE-N-SC2F
Camera probe	PCE-IVE 300-PROBE
Waterproof Camera Cable	PCE-VE 380N-SC30
Semi-Flexible Camera Cables	PCE-VE-N-SCS
Magnetic Hook Attachment	MAG-H-VE-N
Guide Ball	GB-25-PCE-VE-N
Guide Ball	GB-15-PCE-VE-N
Cable Holder	HT-55-PCE-VE
Centering brush	PCE-VE-CB
Surveying Software	SOFT-M-VE-N



PCE-VE-2W3-HR



PCE-VE-N-SC2F



PCE-IVE 300-PROBE



PCE-VE-N-SC1-HR



Subject to changewithout notice

OPTICAL INSPECTION
INSPECTION CAMERA

PCE-VE 1500 SERIES

4-way camera head with electric motors / diameter Ø 2.2 ... 6 mm

The 4-way system makes it possible to move the camera head in a 190° bending radius. The viewing angle is 120°. Control is via a joystick that drives the electric motors on the endoscope camera. Thanks to the particularly narrow camera head with a diameter between 2.2 ... 6 mm, the endoscope camera can be used for endoscopy in, for example, engines, fire-

arms, boreholes and other narrow openings. This means that the endoscope camera can be used to quickly and easily inspect weld seams, wear and damage in order to make quick diagnoses. The touch screen of the industrial endoscope has a size of 7".

ISO cal option

- » 4-way camera head with electric motors
- » 7" touch screen for easy operation
- » exchangeable battery with status display
- » recording storage on SD card
- » motor with endoscope cable can be changed quickly
- » HDMI connection for image transmission
- » brightness adjustable in 5 steps
- » 120° viewing angle and 190° bending radius



APPLICATION



TECHNICAL SPECIFICATIONS

Camera direction	90 °	Model	PCE-VE 1500-60200	Diameter	6 mm	Cable length	2 m
Resolution	160.000 Pixel		PCE-VE 1500-60500		6 mm		5 m
Focusing range	5 ... 50 mm		PCE-VE 1500-38200		3,8 mm		2 m
			PCE-VE 1500-28200		2,8 mm		2 m
			PCE-VE 1500-22190		2,2 mm		1 m
			PCE-VE 1500-38209		3,8 mm		2 m
Further specifications							
Camera head material	titanium alloy						
Material camera hose	braided tungsten						
Material camera lens	glass						
Field of view	120 °						
Illuminance	50.000 lux						
Bending direction	360 ° (4-way camera head)						
Bending angle	190 °						
Display	7" LCD touch screen						
Display resolution	1920 x 1200 pixels						
Image format	JPG						
Video format	MP4						
Image resolution	1280 x 720 pixels						
Video resolution	1280 x 720 pixels						
Digital magnification	8 x						
Memory (internal)	16 GB						
Memory (external)	expandable up to 128 GB for approx. 285,000 images or 1500 minutes of video recording						
Interface	only), audio interface, WiFi						
Power consumption (endoscope)	10 W						
Operating time	>3 hours						
Akku	7,4 V (4 x 18650), 6400 mAh, removable						
Akku (charging)	12 VDC, 3 A						
Power supply	primary: 100 ... 240 VAC 50/60 Hz, 1,5 A secondary: USB-C (PD) maximum 65 W 5 VDC, 3 A 9 VDC, 3 A 12 VDC, 3 A 15 VDC, 3 A 20 VDC, 3,25 A PPS1: 3.6 ... 11 VDC, 3 A PPS2: 3.6 ... 20 VDC, 3 A						
Operating conditions (handset)	5 ... 50 °C, <92 % r. h., non-condensing						
Operating conditions (endoscope cable)	5 ... 80 °C, <92 % r. h., non-condensing						
Storage conditions	5 ... 63 °C, <92 % r. h., non-condensing						
Dimensions	366 x 194 x 137 mm						
Weight	hand-held unit: 1017 g endoscope cable with electric motor: approx. 600 g battery 550 g						



Subject to changewithout notice

TEMPERATURE MEASUREMENT

INFRARED THERMOMETER

PCE-670

Mini handheld thermometer with large measuring range -33 ... 500 °C (-27.4 ... 932 °F)

Simple, handy handheld thermometer for non-contact measurement of surface temperature. The handheld thermometer has a display of the current temperature during the measurement. Within one second you get the surface temperature - the non-contact measuring method even from hot, dangerous or difficult to reach objects. The applications are virtually unlimited. Thus, this handheld thermometer can be

used in the control of heating and air conditioning systems, under-floor heating, for detecting hot spots on electrical systems, etc. The emission value of this handheld thermometer is set to 0.95 and thus covers 90 % of all temperature measurement tasks.

ISO cal option

- » IR temperature measuring range of -33 ... 500 °C / -27.4 ... 932 °F
- » measured value display optionally in °C or °F
- » automatic shutdown
- » display of the current and maximum temperature
- » last measurement is retained for 2 seconds
- » measurement spot ratio 9 : 1
- » easy to handle
- » incl. battery and manual



APPLICATION



TECHNICAL SPECIFICATIONS

Temperature measurement range	-33 ... 500 °C / -27.4 ... 932 °F
Resolution	-9.9 ... 199.9 °C / 14.2 ... 391.8 °F : 0.1 °C / 0.18 °F <10 °C / 50 °F : 1 °C / 1.8 °F >200 °C / 392 °F : 1 °C / 1.8 °F
Accuracy	±2 % of Rd or ±2 °C / 3.6 °F the greater value applies
Optical resolution	9 : 1
Emissivity	0.95 (fixed)
Laser	Circle laser Class 2 <1mW
Operating time	About 30 h
Operating conditions	0 ... 30 °C / 32 ... 86 °F, max. 90 % rh
Storage conditions	-10 ... 40 °C / 14 ... 104 °F, max. 65 % rh
Power supply	1.5 V AA battery
Display	LC display
Dimensions	150 x 25 x 27 mm / 5.9 x 1 x 1.1 in
Weight	About 74 g / <1 lb

Optional accessories:

PCE-MS 25	Measuring Point Sticker
-----------	-------------------------



Subject to changewithout notice

TEMPERATURE MEASUREMENT

DIGITAL THERMOMETER

PCE-895

Cross laser thermometer for non-contact measurement tot 1600 °C

The Dual Laser Digital Thermometer PCE-895 is used for fast surface temperature measurement. The two laser points of the dual laser thermometer PCE-895 mark the exact measuring point and thus offer excellent assistance with the temperature measurement. Due to the cross laser function, the two laser spots indicate exactly how large the actual IR spot is. The emissivity of the dual laser thermometer

PCE-895 is adjustable in the range of 0.10 ... 1.0. Thus, the dual laser thermometer PCE-895 is suitable for almost all surfaces. The temperature measuring range extends from -35 ... 1600 °C / -31 ... 2912 °F. In addition to the IR function, a type K thermocouple can also be connected to the dual laser thermometer.

ISO cal option

- » non-contact temperature measurement
- » 60 :1 optics
- » temperature measurement up to 1600 °C / 2912 °F
- » compact cross laser thermometer
- » double laser shows the spot diameter
- » adjustable emissivity
- » adjustable emissivity
- » alarm function



APPLICATION



TECHNICAL SPECIFICATIONS

Infrared

Measuring range	-35 ... 1600 °C / -31 ... 2912 °F
Measuring accuracy (at 23 ... 25 °C ambient temperature)	-35 ... 0 °C / 0 °F: $\pm 2 \text{ °C} / 3.6 \text{ °F} + 0.05 \cdot T_{\text{obj}}$ 0 ... 1600 °C: $\pm 2 \% \text{ of Rd}$ or $\pm 2 \text{ °C} / 3.6 \text{ °F}$
Resolution	1 °C / 1.8 °F at 1000 ... 1600 °C / 1832 ... 2912 °F

Thermocouple

Measuring range	Type K: -64 ... 1400 °C / -83 ... 2552 °F
Measuring accuracy (at 23 ... 25 °C ambient temperature)	$\pm 1 \% \text{ of Rd}$ or $\pm 1 \text{ °C} / 1.8 \text{ °F}$
Resolution	0.1 °C / 0.18 °F at -64 ... 999.9 °C / -83.2 ... 1831.8 °F

Emissivity	Adjustable 0.10 ... 1.0
Spectral range	8 ... 14 μm
Response time	1 s
Optical resolution / measurement spot ratio	60 :1
Storage	Internal: 24 memory points External (micro-SD card): max. 8 GB supported

Interface	USB
Display	LCD illuminated
Power supply	2 x 1.5 V AA batteries
Operating time	Typical: 14 h Continuous: 10 h
Operating conditions	0 ... 50 °C / 32 ... 122 °F
Weight	approx. 400 g / 14.1 oz
Dimensions	203 x 176 x 89 mm / 7.9 x 6.9 x 3.5 in



Subject to change without notice

TEMPERATURE MEASUREMENT
PYROMETER

PCE-ILD 10

Measuring range -50 ... 500 °C/ Contrast ring with five LEDs

The pyrometer has a measuring range of -50 ... +500 °C (-58 ... 932 °F) and an adjustable emission value between 0.10 ... 1.00. In addition to the current reading, the largest, smallest, average and differential reading can be displayed. This means that the infrared thermometer can be used for many measuring tasks to determine the surface temperature. The multi-point laser on the infrared thermometer is

used to align the measuring spot. The measuring spot ratio of the infrared thermometer is 12:1. Any alarm limit values can be stored on the pyrometer for checking temperatures. When exceeding or falling below an alarm limit value, the infrared thermometer automatically triggers an acoustic and visual alarm.

ISO cal option

- » measuring range -50 ... 500 °C / -58 ... 932 °F
- » fast measuring rate of 2 Hz
- » white and blue lighting ring
- » spot ratio: 12:1
- » multipoint laser



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	-50 ... 500 °C / -58 ... 932 °F
Resolution	0.1 °C / 0.1 °F
Accuracy	±3 °C / ±5.4 °F at -50 ... 20 °C / -58 ... 68 °F ±2 % or ±2 °C / ±3.6 °F at 20 ... 500 °C / 68 ... 932 °F
Repeatability	±1 °C / 1.8 °F
Spot ratio	12:1
Emission rate	0.10 ... 1.00
Measuring rate	2 Hz
Spectral range	8 ... 14 µm
Measuring range exceeded	Display „ - - - “
Laser output power	<1 mW
Wavelength	630 ... 670 nm
Laser class	2
Light ring	5 x white LED, 5 x blue LED
Power supply	2 x 1.5 V AA batteries
Operating conditions	0 ... 50 °C / 32 ... 122 °F, 10 ... 90 % RH, non-condensing
Storage conditions	-10 ... 60 °C / 14 ... 140 °F, 10 ... 90 % RH, non-condensing
Dimensions	180 x 100 x 55 mm / 7.0 x 3.9 x 2.1"
Weight	329 g / 11.6 oz with batteries



Subject to changewithout notice

THERMAL INSPECTION
THERMAL IMAGER

PCE-TC 30N

Temperature range -20 ... 450°C / -4 ... 842°F / Resolution 160 x 120 pixels

The PCE-TC 30N thermal imaging camera for preventive maintenance is the ideal tool for preventative maintenance. This thermal imaging camera is a must-have for electricians, fitters, or general maintenance personnel for trouble shooting and fault prevention on electrical equipment, electromechanical equipment, production process machinery, heating, ventilation, and air conditioning systems, espe-

cially when working in harsh environments. The operator can use the PCE-TC 30N high-resolution thermal imaging camera for preventive maintenance, to detect evolving faults on machinery and equipment. The preventive maintenance and service is thus made easy.

ISO cal option

- » IR resolution: 160 x 120 pixels
- » measuring range: -20 ... 450°C / -4 ... 842°F
- » thermal sensitivity: 70 mK
- » memory: 3 GB memory for more than 20,000 pictures
- » 5 different color palettes
- » hot and cold spot location
- » picture in picture function



APPLICATION



TECHNICAL SPECIFICATIONS

Infrared sensor	
Resolution	160 x 120 pixels
Wavelength	8 ... 14 µm
Thermal sensitivity	70 mK
Refresh rate	9 Hz
Field of view (FOV)	35 ° x 26 °
Focusing	Firm focus
Smallest distance	0.15 m / 5.9 in
Temperature range	-20 ... 450 °C / -4 ... 842 °F
Accuracy	±2 °C / 3.6 °F, ±2 % From 300 °C / 572 °C, ±5 %
Calibration of the measurement Auto	
Number of spots	1
Number of measuring ranges	1
Emissivity	Range: 0.01 ... 1.00
Color palettes	Rainbow, iron oxide red, cold color, black & white, white & black
Other specifications	
Picture in picture function	Adjustable 25 %, 50 %, 75 %, 100 %
Camera resolution	300,000 pixels
Screen	2.8" TFT
Screen resolution	320 x 240 pixels
Image memory	Built-in SD card with 3 Gb for more than 20,000 images
Image format	JPG
Power supply battery	Built-in 18650 battery, about 2800-mAh
Power supply power supply	Primary: 100 ... 240 V AC 50/60 Hz Secondary: 5 V / 2 ADC
Interface	Micro USB for charging and memory readout on a PC
Operating time	Between 2 ... 3 hours
Menu languages	English, Chinese, Italian, German
Automatic shutdown	After 5, 20 minutes or disabled
Ambient temperature	0 ... 45 °C / 32 ... 113 °F
Storage conditions	-20 ... 60 °C / -4 ... 140 °F
Humidity	≤ 85% RH (non-condensing)
Dimensions	96 x 72 x 226 mm / 3.8 x 4.1 x 8.9 in
Weight	389 g / < 1 lb



Subject to changewithout notice

THERMAL INSPECTION
DIGITAL THERMOMETER

PCE-TC 33N

Measuring range up to 300 °C / Thermal sensitivity 70 mK

The infrared thermometer PCE-TC 33N is the ideal tool for repair work and prevention measures. This thermal imager is a must-have for electricians, fire fighters, locksmiths, or general service personnel for trouble shooting and fault prevention on electrical equipment, electromechanical equipment, production process machinery, heating, ventilation, and air conditioning systems, especially when working

in harsh environments. In preventative maintenance, the high-resolution PCE-TC 33N thermal imager is ideal for maintaining or repairing machinery or other equipment. At the heart of the PCE-TC 33N high-resolution thermography camera is an uncooled microbolometer (uncooled focal plane array) with a resolution of 220 x 160 pixels.

ISO cal option

- » IR resolution: 220 x 160 pixels
- » measuring range: -20 ... 300 °C / -4 ... 572 °F
- » thermal sensitivity: 70 mK
- » memory: 3 GB memory for more than 20,000 pictures
- » 5 different color palettes
- » hot and cold point location
- » picture in Picture function



APPLICATION



TECHNICAL SPECIFICATIONS

Infrared sensor	
Resolution	220 x 160 pixels
Wavelength	8 ... 14 µm
Thermal sensitivity	70 mK
Refresh rate	9 Hz
Field of view (FOV)	35 ° x 26 °
Focusing	Firm focus
Smallest distance	0.15 m / 5.9 in
Temperature range	-20 ... 300 °C / -4 ... 572 °F
Accuracy	±2 °C / 3.6 °F, ±2 %
Calibration of the measurement	Auto
Number of spots	1
Number of measuring ranges	1
Emissivity	Range: 0.01 ... 1.00
Color palettes	Rainbow, iron oxide red, cold color, black & white, white & black
Other specifications	
Picture in picture function	Adjustable 25 %, 50 %, 75 %, 100 %
Camera resolution	300,000 pixels
Screen	3.2" TFT
Screen resolution	320 x 240 pixels
Image memory	Built-in SD card with 3 Gb for more than 20,000
images	
Image format	JPG
Power supply battery	Built-in 18650 battery, about 2800-mAh
Power supply power supply	Primary: 100 ... 240 V AC 50/60 Hz
	Secondary: 5 V / 2 ADC
Interface	Micro USB for charging and memory readout on a PC
Operating time	Between 2 ... 3 hours
Menu languages	English, Chinese, Italian, German
Automatic shutdown	After 5, 20 minutes or disabled
Ambient temperature	0 ... 45 °C / 32 ... 113 °F
Storage conditions	-20 ... 60 °C / -4 ... 140 °F
Humidity	≤85 % RH (non-condensing)
Dimensions	90 x 103 x 223 mm / 3.5 x 4.1 x 8.8 in
Weight	424 g / < 1 lb



Subject to changewithout notice

THERMAL INSPECTION
THERMAL IMAGER

PCE-TC 34N

With 3 GB memory / Measuring range -20 ... 300 °C

The thermal imager has a resolution of 320 x 240 pixels. With a measuring range of -20 ... 300 °C, the thermometer already covers a large temperature range. In order to carry out measurements on different surfaces, the emission value of the thermometer can be set between 0.01 ... 1.00. During the measurement, the coldest and the hottest temperature of the surface at which the thermometer

is pointed are displayed in addition to the spot temperature. For a better analysis of the temperature, the thermal image displayed on the thermal imager can be displayed in five different color palettes: rainbow, iron, cold colors, white-black (+inverted).

ISO cal option

- » measuring range -20 ... 300 °C / -4 ... 572 °F
- » storage for about 20,000 images
- » picture in picture function
- » field of view 35° x 26°
- » USB-C interface for transmission
- » different color palettes
- » removable 18650 battery
- » automatic shutdown



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	-20 ... 300 °C / -4 ... 572 °F
Resolution	0.1 °C / 0.1 °F
Accuracy	±2 % of measured value or ±2 °C / ±3.6 °F the larger value applies
Infrared and real image resolution	320 x 240 pixels
Picture in picture	5 steps
Field of View (FOV)	35° x 26°
Depth of field	>0.15 m / 0.49 ft
Emission range	0.01 ... 1.00
Refresh rate	9 Hz
Wavelength	8 ... 14 µm
Focus	fixed
Color palette	rainbow, iron, cold colors white-black (+inverted)
Display	3.5" TFT color display
Memory	3 GB for ca. 20,000 images
Image format	JPG
Interface	USB-C for charging and data transfer
Auto power off	off / 5 minutes / 20 minutes
Power supply (battery)	3.7 V, 2600 mAh, type 18650
Power supply (mains power adapter)	primary: 100 ... 240 VAC, 50 / 60 Hz secondary: 5 VDC, 2 A
Operating time with battery	min. 2 hours
Menu languages	English, German, Chinese, Italian
Storage conditions	-20 ... 60 °C / -4 ... 140 °F, <85 % RH non-condensing
Ambient conditions	0 ... 45 °C / 32 ... 113 °F, <85 % RH non-condensing
Tripod mount	1/4"
Dimensions	221 x 96 x 88 mm / 8.7 x 3.7 x 3.4"
Weight	372 g / 13 oz



Subject to changewithout notice

LEAKAGE LOCATION
GAS LEAK DETECTOR

PCE-LDC 8

Leak detector for compressed air lines / operating frequency 40 kHz

The Gas Leak Detector is used to locate leaks on compressed air lines. Furthermore, the Gas Leak Detector can also be used on coolant lines or gas lines for leak detection. The Gas Leak Detector is equipped with an ultrasonic sensor that can precisely detect leaks in air lines. The ultrasound sensor from the Gas Leak Detector works at a frequency of 40 kHz. This means that the Gas Leak Detector is calibrated to the

medium frequency that leaks on pressure lines emit. This is in the range between 20 ... 80 kHz. A high-pass filter in the leak detector ensures that all noises are filtered at a frequency <40 kHz in order to perform a better leak detection. An integrated amplifier element in the leak detector ensures that the high-frequency tones.

ISO cal option

- » working frequency of 40 kHz
- » easy to use
- » up to 6 h battery operation
- » Leak detection via headphones and LCD display
- » robust and ergonomic
- » can be used over long distances



APPLICATION



TECHNICAL SPECIFICATIONS

measuring principle	Ultrasonic
measuring medium	Air, coolant, non-explosive gases
operating frequency	40 kHz ± 2 kHz
connections	3.5 mm jack plug for sensor 3.5 mm jack plug for headphones and charger
display	LC display
power supply	NiMH battery
operating time	approx. 6 h without laser pointer approx. 4 h with laser pointer
charging time	about 1.5 h
operating temperature	Normal operation: 0 ... 40 ° C Charging mode: 10 ... 40 ° C
laser	2nd grade; <1mW; 650 nm
Dimensions	7.54 x 3.44 x 2.09 in; 191.5 x 87.5 x 53 mm
Weight	approx. 250 g

Measurement options pressure vs. Diameter / range

print	diameter	Range
0.5 bar	0.1 mm	6.6 ft, 2 m
	0.2 mm	6.6 ft, 2 m
	0.5 mm	32.8 ft, 10 m
print	diameter	Range
5 bar	0.1 mm	26.2 ft, 8 m
	0.2 mm	45.9 ft, 14 m
	0.5 mm	59.1 ft, 18 m



Subject to changewithout notice

LEAKAGE LOCATION LEAK DETECTOR

PCE-LDC 15

Leakage detection via sound/noise measurement / operating frequency 40 kHz

The leak detector is used in various areas of industry. For example, the leak detector is used on compressed air, gas, steam and vacuum systems, as well as on refrigeration systems and door seals. The working frequency of the leak detector is 40 kHz (± 2 kHz). The soundproof headphones on the leak detector ensure that it can also be used in extremely noisy environments. The leak detector is used wherever

gases can escape from leaks in piping systems. The noises caused by the outflow are often in the ultrasonic range and are therefore imperceptible to the human ear.

ISO cal option

- » working frequency 40 kHz (± 2 kHz)
- » operating time >10 hours
- » various attachments
- » transport case for safe transport
- » easy to use thanks to the touchscreen
- » soundproof headphones



APPLICATION



TECHNICAL SPECIFICATIONS

Working frequency	40 kHz (± 2 kHz)
Laser	wavelength 630 ... 660 nm, output power <1mW (laser class 2)
Color display	3.5" touch panel TFT
Connections	3.5 mm jack plug for headphones, power supply socket for connecting an external charger USB port for software updates
Power supply	internal 7.4 V lithium-ion battery
Charging time	max. 4 hours
Operating time	>10 h (continuous operation)
Degree of protection	IP20
Operating conditions	-5 ... +50 °C / 23 ... 122 °F, <95 % RH, non-condensing
Storage conditions	-20 ... 60 °C / -4 ... 140 °F, <95 % RH, non-condensing
Altitude	4000 m above sea level
Permitted Pollution degree	2
Dimensions	263 x 96 x 280 mm / 10.3 x 3.7 x 11" (with preamplifier and horn)
Weight	0.55 kg / 1.2 lb with preamplifier and horn, complete set in case approx. 3.0 kg / 6.6 lb



Subject to change without notice

LEAKAGE LOCATION GAS DETECTOR

PCE-GA 10

Gas leak detector for flammable gases / Optical, acoustic and haptic alarm

The gas leak detector PCE-GA 10 is used to check for leaks in gas pipes and connections. This gas leak detector is suitable for many flammable gases. The gas leak detector has 5 LEDs that inform the gas intensity. In addition to the visual information, the gas leak detector has an audible and haptic alarm. This means that, depending on the level, the gas leak detector emits an alarm tone and vibrates at the

same time. The leak detector is therefore ideal for detecting sporadic gases. The gas leak detector is therefore of great help to employees who want to inspect plants during a plant tour or inspect engines, supply lines or gas lines. The gas leak detector is supplied with a rechargeable battery.

ISO cal option

- » LED display
- » for flammable gases
- » 500 mm sensor
- » optical, acoustic and haptic alarm
- » fast response time
- » rechargeable battery



APPLICATION



TECHNICAL SPECIFICATIONS

Testable gases	Acetaldehyde Ammonia Benzene Ethan Ethanol Ethylene Formaldehyde Hexane ISO-butane Methane Propane P-xylene Hydrogen sulfide Toluene Hydrogen
And compounds in which these gases occur	
Measuring range (methane)	0 ... 10000 ppm
Sensitivity (methane)	<50 ppm
Display stages	High: 100 / 400 / 700 / 1000 ppm Low: 1000 / 4000 / 7000 / 10000 ppm
Response time	<2 s
Heating time	approx. 50 s
Alarm types	Optical, acoustic, haptic
Power supply	3.7 V Li-ion battery
Lifetime sensor	On average, 5 years
Sensor length	500 mm
Dimensions	211 x 70 x 45 mm / 8.3 x 2.7 x 1.7 in
Weight	approx. 400 g / <1 lb
Optional accessories:	
Replacement sensor	Order no.: ESS-PCE-GA 12
Replacement sensor	Order no.: ESS-PCE-GA 10



Subject to change without notice

LEAKAGE LOCATION GAS DETECTOR



PCE-GA 12

Gas flammable gas detector / Measured value display up to 10000 ppm

The gas detector PCE-GA 12 is a very easy-to-use measuring device. This gas detector detects combustible gases and emits a vibrating alarm as well as an audible alarm once a combustible gas has been detected by the gas detector. Thanks to the semi-rigid hose on the gas detection device, the sensor can be aligned in almost any position to reach even inaccessible places.

This makes the gas detection device an ideal measuring device for employees who want to detect sporadically escaping gases (testing of plants during a tour of the plant, checking engines and supply lines, testing gas supply lines). A manual setting of the gas detector is not necessary as the gas detector automatically calibrates.

ISO cal option

- » audible alarm with 85 dB
- » rechargeable battery for mobile use
- » automatic calibration
- » measuring range up to 10000 ppm
- » for the detection of combustible gases
- » durability of the sensor about 5 years
- » vibrating alarm when detecting gases
- » sensor changeable



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	at low concentration 0 ... 1000 ppm
(only for methane)	at high concentration 0 ... 10000 ppm
Acoustic alarm	Volume: 85 dB
Sensitivity	<10 ppm (with methane)
Measuring interval	<2 seconds
Display	Measurement of combustible gases on the LC display, bar graphs
Calibration	automatically
Warming up	40 seconds
Battery	Polymer Li-ion battery 18500 3.7 V
Power adapter	Primary side: 100 ... 240 V, 50/60 Hz, 0.2 A
	Secondary side: 5 V, 1 A
Automatic shutdown	turns off if the battery capacity is too low by itself or after 10 minutes if not used.
Sensor durability	about 5 years (sensor is interchangeable)
Probe	semi-rigid 400 mm / 16"
Weight	about 430 g / <1 lb



Subject to change without notice

CONDUCTIVITY MEASUREMENT

CONDUCTIVITY TESTER FOR NFE METALS

PCE-COM 20

With wide measuring range of up to 112 % IACS or 65 MS/m

The conductivity tester for measuring the electrical conductivity of non-ferrous metals such as aluminium or copper belongs to the group of NDT devices. The conductivity tester is used in non-destructive material testing. By means of the eddy current measuring principle which has proven for this application, the electrical conductivity of metallic materials can be determined quickly and precisely. With its

operating frequency of 60 kHz, the conductivity tester has a wide measuring range of 0.51 ... 112 % IACS and reaches an accuracy of +/-0.5 % at 20 °C, with a resolution of up to 0.01 % IACS.

ISO cal option

- » user-friendly hand-held meter
- » memory for up to 500 groups of measurements
- » durable internal rechargeable battery
- » lift-off and temperature compensation
- » adjustable backlight
- » for mobile use
- » automatic calibration
- » operating frequency of 60 kHz
- » incl. 3 calibration plates (titanium 1.03 % IACS, bronze 8.11 % IACS and copper 100 % IACS)



APPLICATION



TECHNICAL SPECIFICATIONS

Operating frequency	60 kHz, sine wave
Conductivity measuring range	0.51 % IACS ... 112 % IACS 0.3 MS/m ... 65 MS/m resistance 0.015388 ... 3.33333 $\Omega \cdot \text{mm}^2/\text{m}$
Conductivity resolution	0.01 % IACS (at <51 % IACS) 0.1 % IACS (at 51 % IACS ... 112 % IACS)
Conductivity accuracy	± 0.5 % at +20 °C / 68 °F ± 1 % at 0 ... +40 °C / 32 ... 104 °F
Lift-off effect	probe compensation 0.5 mm
Temperature measuring range	0 ... +50 °C / 32 ... 122 °F
Temperature accuracy	± 0.5 °C
Automatic compensation	Automatic adjustment of conductivity result to the value at 20 °C / 68 °F
Operating conditions	0 ... 50 °C / 32 ... 122 °F, 0 ... 95 % RH
Display	LCD with backlight
Menu languages	English, German, Chinese (simplified)
Power supply	internal rechargeable battery
Probe	$\varnothing 14$ mm / ≈ 0.55 in
Memory	up to 500 groups of measurement values
Data interface	USB
Dimensions	220 x 95 x 35 mm / 8.66 x 3.74 x 1.38 in
Weight	415 g / 1 lb (with probe)

Optional accessories:

Calibration standard titanium	1.02 % IACS	Order code PCE-COM 20-CP1
Calibration standard brass	21.02 % IACS	Order code PCE-COM 20-CP9
Calibration standard magnesium	11.88 % IACS	Order code PCE-COM 20-CP11
Calibration standard magnesium	31.88 % IACS	Order code PCE-COM 20-CP3
Calibration standard copper	87.24 % IACS	Order code PCE-COM 20-CP10
Calibration standard copper	60.69 % IACS	Order code PCE-COM 20-CP8
Calibration standard copper	101.03 % IACS	Order code PCE-COM 20-CP13
Calibration standard bronze	8.47 % IACS	Order code PCE-COM 20-CP12
Calibration standard bronze	10.55 % IACS	Order code PCE-COM 20-CP5
Calibration standard bronze	15.24 % IACS	Order code PCE-COM 20-CP2
Calibration standard aluminium	15.29 % IACS	Order code PCE-COM 20-CP7
Calibration standard aluminium	32.07 % IACS	Order code PCE-COM 20-CP6
Calibration standard aluminium	57.41 % IACS	Order code PCE-COM 20-CP4
Calibration standard aluminium	41.21 % IACS	Order code PCE-COM 20-CP14



Subject to changewithout notice

GAUSS METER ELECTROMAGNETIC FIELD GAUGE

PCE-MFM 2400 SERIES

Tesla and Gauss measurement for static magnetic fields

With a measuring range up to 2,400 mT, the electromagnetic field meter covers a wide range of measuring tasks. The electromagnetic field meter has an accuracy of 1 % which makes it a very precise meter. The electromagnetic field meter can be used, for instance, to test relays and permanent magnets for existing magnetic fields. It is therefore often used in production processes or in quality control.


With the backlight of the electromagnetic field meter, the measured values are always easy to read even under poor lighting conditions.

ISO cal option

- » very precise measurement technology
- » measuring range up to 24,000 G and 2,400 mT
- » transversal and axial sensor
- » measures static magnetic fields
- » automatic shutdown



APPLICATION




TECHNICAL SPECIFICATIONS

Measuring range	0... 200 mT 200... 2,400 mT 0 ... 2,000 G 2,000 ... 24,000 G
Accuracy	±1 % of Rd
Resolution	0.01 mT 0.1 g
Measuring direction	Transversal
Magnetic field	Static (DC)
Unit	mT, G
Power supply	1 x 9 V block battery
Automatic shutdown	Automatic shutdown after 5 minutes in idle status
Modes	Hold mode, measurement mode
Display	Backlight, digital 4-digit display
Operating temperature	32 ... 122 °F, / 0 ... 50 °C
Storage temperature	-4 ... 122 °F / 20 ... 50 °C
Dimensions	185 x 97 x 40 mm / 7.28 x 3.82 x 1.57 in
Weight	0.68 lb, 310 g

Further Models:

PCE-MFM 2400 Sensor	Hall sensor transversal, cable length approx. 3.28 ft., 1 m
PCE-MFM 2400+ Sensor	Axial Hall sensor, cable length approx. 6.56 ft., 2 m

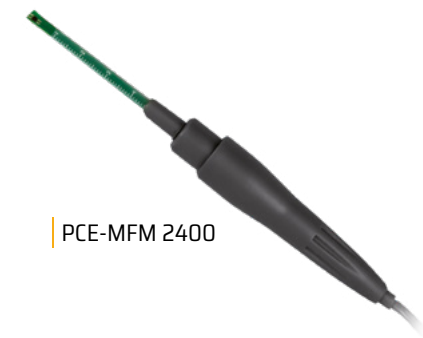

PCE-MFM 2400



PCE-MFM 2400+



Subject to changewithout notice

FLOW MEASUREMENT
ULTRASONIC FLOW METER

PCE-TDS 200 SERIES

Flow velocity / volume flow and volume / heat quantity

The flow meter has a measuring range of ± 32 m/s. With an accuracy of ± 1.5 % f.s. for a pipe diameter of $DN \geq 50$, ± 3.5 % f.s. for a pipe diameter of $DN < 50$ and a reproducibility of ± 0.5 % f.s., the flow meter is a particularly precise measuring device. The installation aid graphically displays the signal quality from the flow meter. In addition, it is graphically displayed whether the sensors of the flow meter are positioned

at the correct distance from each other. To carry out flow measurement with the flow meter, the flow velocity, the volume flow and the volume are displayed after entering the pipe and medium specifications.

ISO cal option

- » measuring range: ± 32 m/s
- » reproducibility of ± 0.5 % of the measured value
- » various ultrasonic probes available
- » heat quantity measurement (only PCE-TDS 200+ series)
- » data memory for 10 million measuring points (32 GB)
- » individually adjustable alarm limits
- » USB-C interface for data transfer
- » optional: software and calibration certificate ISO or DAkkS



APPLICATION



TECHNICAL SPECIFICATIONS

Flow measurement		Temperature (only PCE-TDS 200+)	
Measuring range	± 32 m/s	Measuring range	type B 600 ... 1800 °C
Resolution	0.001 m/s		type E -100 ... 900 °C
Accuracy $DN \geq 50$ mm	± 1.5 % of Rd for velocities > 0.3 m/s		type J -100 ... 1150 °C
Accuracy $DN < 50$ mm	± 3.5 % of Rd for velocities > 0.3 m/s		type K -100 ... 1370 °C
Repeatability	± 0.5 % of Rd		type N -100 ... 1150 °C
Temperature resistance	-30 ... +160 °C		type R 0 ... 1700 °C
Measuring method	N / V / W / Z		type S 0 ... 1500 °C
Medium	Petrol	Resolution	type T -100 ... +400 °C
	Diesel		0,1 °C
	Ethanol	Accuracy	type B $\pm(0,5 \% + 3\text{ °C})$
	Sea water		type E $\pm(0,4 \% + 1\text{ °C})$
	Methanol		type J $\pm(0,4 \% + 1\text{ °C})$
	Oil		type K $\pm(0,4 \% + 1\text{ °C})$
	Petroleum		type N $\pm(0,4 \% + 1\text{ °C})$
	Crude oil		type R $\pm(0,5 \% + 3\text{ °C})$
	Water		type S $\pm(0,5 \% + 3\text{ °C})$
	User defined (manual input of sound velocity from the medium)		type T $\pm(0,4 \% + 1\text{ °C})$

Suitable for all liquids with an impurity of less than 5 %.

Pipe material	Copper CU
	Steel FE
	Stainless steel VA
	Aluminium AL
	Brass ME
	Cast iron CI
	Iron FE
	Nickel NI
	Titanium TI
	Zinc ZI
	Acrylic AC
	Polyethylene PE
	Polypropylene PP
	Polyvinyl chloride PVC
	Nylon NY
	User defined (manual input of the sound velocity of the pipe material)

Inner pipe lining	No lining
	Epoxy resin
	Rubber
	Mortar
	Polystyrene PS
	Polyethylene PE
	Polytetrafluoroethylene PTFE
	Polyurethane PU
	Polypropylene PP
	User defined (man. Input of the longitudinal sound velocity of the inner lining of the pipe)



Subject to changewithout notice

FLOW MEASUREMENT
ULTRASONIC FLOW METER

TECHNICAL SPECIFICATIONS

Further specifications

Table with 2 columns: Specification and Value. Rows include: Measuring parameters (PCE-TDS 200, PCE-TDS 200+), Unit | linear dimension, Unit | Flow velocity, Unit | Flow rate, Unit | Volume, Unit | Temperature, Unit | Heat quantity, Unit | Heat output, Unit | Cost display, Date / Time, Display, Units, Memory, Menu languages, Operating and Storage conditions, Interface, Protection class, Power supply, Charger, Operating time, Dimensions, Weight.

Table with 5 columns: Sensor Order.-no., Nominal diameter in DN *, Dimensions Sensor, Temperature Measuring range, Rail. Rows include: PCE-TDS 200 L SENSOR, PCE-TDS 200 M SENSOR, PCE-TDS 200 MR SENSOR, PCE-TDS 200 S SENSOR, PCE-TDS 200 SR SENSOR.

*The nominal diameter is the inside diameter of a pipe.
Note : If you order the sensor later, we need the PCE-TDS 200 device to adapt the sensor to the device.

TECHNICAL SPECIFICATIONS

Model
PCE-TDS 200

PCE-TDS 200 L
PCE-TDS 200 M
PCE-TDS 200 ML

PCE-TDS 200 MR
PCE-TDS 200 S
PCE-TDS 200 SL

PCE-TDS 200 SM

PCE-TDS 200 SML

PCE-TDS 200 SR

Model
PCE-TDS 200+

PCE-TDS 200+ L
PCE-TDS 200+ M
PCE-TDS 200+ ML

PCE-TDS 200+ MR
PCE-TDS 200+ S
PCE-TDS 200+ SL

PCE-TDS 200+ SM

PCE-TDS 200+ SML

PCE-TDS 200+ SR

Accessories
CAL-PCE-TDS-ISO
CAL-PCE-TDS-DAkkS
CAL-T2

Additional sensors
PCE-TDS 200 case
PCE-TDS 200 SW
TF-RA330
TF-RA330-3
TF-RA330-5
TT-GEL
K-Gel

Sensors are included in the scope of delivery
Standard version

PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 MR SENSOR for DN 50 ... 700
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 SR SENSOR for DN 15 ... 100

Sensors included in the scope of delivery
Version with temperature sensors

PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 MR SENSOR for DN 50 ... 700
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 S SENSOR for DN 15 ... 100
PCE-TDS 200 M SENSOR for DN 50 ... 700
PCE-TDS 200 L SENSOR for DN 300 ... 6000
PCE-TDS 200 SR SENSOR for DN 15 ... 100

ISO Calibration Certificate
DAkkS Calibration Certificate
Calibration certificate for 2-channel thermometer

see table above
spare transport case
software
Temperature Contact Sensor Typ T, 1 m
Temperature Contact Sensor Typ T, 3 m
Temperature Contact Sensor Typ, 5 m
Ultrasonic Contact Gel, 100 ml
High Temperature Coupling Gel, 100 ml

Delivery Scope
1 x Ultrasonic flow meter PCE-TDS 200
1 x Flow sensors (depending on model)
2 x Temperature sensor TF-RA330 (only PCE-TDS 200+)
2 x Connection cable 5 m
2 x detachable cable ties
1 x power supply unit
1 x USB-C cable
1 x ultrasonic contact gel
1 x PCE measuring tape
1 x plastic case
1 x instruction manual



Subject to changewithout notice

AIR FLOW MEASUREMENT
AIR FLOW METER

PCE-HWA 30

Hot wire anemometer/ Telescopic arm with swiveling head / Measuring range 0.3 ... 30.0 m/s

The air flow meter measures the flow velocity according to the hot wire principle. This guarantees a particularly compact design. The measuring range of the hot wire anemometer is between 0.3 ... 30.0 m/s / 0.98 ... 98.4 ft/s. In addition to the flow velocity, the hot wire anemometer can measure the volume flow and the ambient temperature. For each measurement, a Beaufort scale is displayed next to

the measured value. The current wind strength can be read from this scale. With the integrated data memory, up to 960 measured values can be recorded with the air flow meter. The data can be read directly on the hot wire anemometer.

ISO cal option

- » hot wire anemometer with data storage
- » software for reading out the measured values
- » swiveling telescopic arm
- » measuring range 0.3 ... 30.0 m/s / 0.98 ... 98.4 ft/s
- » data memory for 960 measured values
- » beaufort scale



APPLICATION



TECHNICAL SPECIFICATIONS

Wind speed	m/s	Further specifications	
Measuring range	0.3 ... 30.0 m/s	Probe length	270 ... 990 mm / 10.63 ... 38.98"
Resolution	0.01 m/s	Probe diameter	Ø 0.8 ... 1.2 mm / 0.031 x 0.047"
Accuracy	±3 % ±0.1 m/s of measured value	Interface	Micro USB
		Data memory	960 measured values
Wind speed	ft/min	Power supply	3.7 V, 1000 mAh battery
Measuring range	60 ... 5904 ft/min		5 V DC, 1 A Micro USB interface
Resolution	0.01, 0.1, 1 ft/min	Power consumption	15 ... 35 mA without background lighting
Accuracy	±3 % ±20 ft/min of measured value		70 ... 100 mA with background lighting
Wind speed	knots	Battery discharged display	<3.4 V
Measuring range	0.6 ... 58.3 knots	Operating conditions	0 ... 50 °C / 32 ... 122 °F,
Resolution	0.01 knots		40 ... 80 % RH, non-condensing
Accuracy	±3 % ±0.2 knots of measured value	Storage conditions	-20 ... 60 °C / -4 ... 140 °F,
Wind speed	km/h		< 80 % RH, non-condensing
Measuring range	1.0 ... 108.0 km/h	Dimensions	70 x 194 x 35 mm / 2.7 x 7.6 x 1.3"
Resolution	0.01 km/h	Weight	400 g / 14 oz
Accuracy	±3 % ±0.4 km/h of measured value		
Wind speed	mph		
Measuring range	0.7 ... 67 mph		
Resolution	0.01 mph		
Accuracy	±3 % ±0.2 mph of measured value		
Volume flow	CMM (m³/min)		
Measuring range	0 ... 999900 m³/min		
Resolution	0.001 ... 100 m³/min		
Adjustable area	0.001 ... 999 m²		
Volume flow	CFM (FT³/min)		
Measuring range	0 ... 999900 ft³/min		
Resolution	0.001 ... 100 m³/min		
Adjustable area	0.001 ... 999 m³		
Temperature measurement	°C		
Measuring range	0 ... 45 °C		
Resolution	0.1 °C		
Accuracy	±1.0 °C		
Temperature measurement	°F		
Measuring range	32 ... 113 °F		
Resolution	0.18 °F		
Accuracy	±1.8 °F		



Subject to changewithout notice

AIR FLOW MEASUREMENT
MULTIFUNCTION AIR VELOCITY METER

PCE-AM 45

Air velocity meter with Beaufort scale / Measuring range 0.3 ... 45.0 m/s

The multifunction air velocity meter determines the wind speed via an impeller with a diameter of 65 mm / 2.5". The anemometer can reliably determine the speed in a measuring range of 0.3 ... 45.0 m/s / 0.9 ... 147 ft/s. In addition to the speed measurement with the anemometer, a volume flow measurement can also be carried out. In addition to the normal measured value display on the anemometer, a

Beaufort scale is stored. The wind strength level is displayed directly on the Beaufort scale on the anemometer. Depending on the orientation of the impeller, the multifunction air velocity meter can also be used to determine the wind direction. This is made possible by the anemometer's built-in gyroscope.

ISO cal option

- » battery operation for mobile use
- » telescopic probe with a length of 270 ... 540 mm / 10.63 ... 21.26"
- » impeller opening of 65 mm / 2.5"
- » velocity and volume flow measurement
- » measuring range 0.3 ... 45.0 m/s / 0.9 ... 147 ft/s
- » backlit LC display



APPLICATION



TECHNICAL SPECIFICATIONS

Wind speed	m/s	CFM (FT³/min)	
Measuring range	0.3 ... 45.0 m/s	Measuring range	0 ... 999900 ft³/min
Resolution	0.01 m/s	Resolution	0.001 ... 100 m³/min
Accuracy	±3 % ±0.1 m/s of measured value	Adjustable area	0.001 ... 999 m³
Wind speed	ft/min	Temperature measurement	°C
Measuring range	60 ... 8800 ft/min	Measuring range	0 ... 45 °C
Resolution	0.01, 0.1, 1 ft/min	Resolution	0.1 °C
Accuracy	±3 % ±20 ft/min of measured value	Accuracy	±1.0 °C
Wind speed	knots	°F	
Measuring range	0.6 ... 88.0 knots	Measuring range	32 ... 113 °F
Resolution	0.01 knots	Resolution	0.18 °F
Accuracy	±3 % ±0.2 knots of measured value	Accuracy	±1.8 °F
Wind speed	km/h	Moisture measurement	
Measuring range	1.0 ... 140.0 km/h	Measuring range	10 ... 90 % RH
Resolution	0.01 km/h	Resolution	0.1 % RH
Accuracy	±3 % ±0.4 km/h of measured value	Accuracy	±5 % RH
Wind speed	mph	Further specifications	
Measuring range	0.7 ... 100 mph	Probe length	270 ... 540 mm / 10.63 ... 21.26"
Resolution	0.01 mph	Probe opening	Ø 65 mm / 2.5"
Accuracy	±3 % ±0.2 mph of measured value	Interface	Micro USB
Wind direction		Data memory	960 measured values
Measuring range	0 ... 360 °	Power supply	4 x 1.5 V AAA batteries
Resolution	1 °	Power consumption	15 ... 20 mA without background lighting
Accuracy	- - -	lighting	20 ... 25 mA with background lighting
Volume flow	CMM (m³/min)	Battery discharged display	0 ... 8 µA standby
Measuring range	0 ... 999900 m³/min	Operating conditions	<4.5 V
Resolution	0.001 ... 100 m³/min	non-condensing	0 ... 50 °C / 32 ... 122 °F, 40 ... 80 % RH,
Adjustable area	0.001 ... 999 m²	Storage conditions	-20 ... 60 °C / -4 ... 140 °F, <80 % RH,
		Dimensions	70 x 194 x 35 mm / 2.7 x 7.6 x 1.3"
		Weight	400 g / 14.1 oz



Subject to changewithout notice

CURRENT CLAMP MEASUREMENT
DIGITAL MULTIMETER

PCE-CTI 10

Measuring range 0 ... 1500 V AC/DC / with Bluetooth 4.0 interface

The digital multimeter is the ideal measuring device for measuring voltages up to 1500 V AC/DC and currents up to 1000 A AC/DC. The current measurement with the clamp meter is inductive. To do this, the supply line is placed in the clamp meter. This has the particular advantage that the current can be measured during operation. This means that the clamp meter is used, for example, for maintenance work on

a photovoltaic system. Photovoltaic systems consist of many different solar cells that are connected in series with one another. Here, the current clamps can be used to measure the individual currents of individual rows in order to limit possible errors.

ISO cal option

- » measuring range 0 ... 1500 V AC/DC
- » data logging for up to 100,000 measured values
- » inrush current measurement
- » additionally with LowZ voltage measurement
- » 2.36" TFT display
- » with voltage and temperature measurement
- » optionally with calibration certificate



APPLICATION



TECHNICAL SPECIFICATIONS

Storage space	16 groups with a total storage space of 100,000 measured values	Resolution	0.1 V
Clamp diameter horizontal	38 mm / 1.49"	Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$
Clamp diameter vertical	63 mm / 2.48"		61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$
Clamp opening	45 mm / 1.77"		0 ... 1500 V
Protection class	IP65	Measuring range	1 V
Interface	Bluetooth 4.0	Resolution	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$
Pollution degree	2	Accuracy	61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$
Insulation categories	CAT IV 600 V, CAT III 1000 V, CAT II 1500 V		
Maximum working height	2000 m / 6562 ft		
Power supply battery	7.4 V, 1200 mAh Li-ion battery		
Power supply charger	Primary: 100 ... 240 V AC, 50 ... 60 Hz Secondary: 12 V DC, 2 A		
Plug connection charger	Europe, USA, England, China available		
Battery status display	switched off, 15, 30 or 60 minutes		
Automatic switch-off	2.36" TFT		
Display	3 Hz		
Display frequency	18 ... 28 °C, 64 ... 82 °F; <80 % RH, non-condensing		
Reference conditions	275 x 100 x 45 mm / 10.8 x 3.9 x 1.7"		
Dimensions	481 g / 16.9 oz		
Weight			
DC voltage			
Measuring range	$\pm 600.0 \text{ mV}$		
Resolution	0.1 mV		
Accuracy	$\pm(0.8\% \text{ of measured value} + 8 \text{ digits})$		
Measuring range	$\pm 6.000 \text{ V}$		
Resolution	0.001 V		
Accuracy	$\pm(0.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	$\pm 60.00 \text{ V}$		
Resolution	0.01 V		
Accuracy	$\pm(0.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	$\pm 600.0 \text{ V}$		
Resolution	0.1 V		
Accuracy	$\pm(0.8\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	$\pm 1500 \text{ V}$		
Resolution	1 V		
Accuracy	$\pm(0.8\% \text{ of measured value} + 5 \text{ digits})$		
AC voltage			
Measuring range	0.000 ... 6.000 V		
Resolution	0.001 V		
Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$		
	61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	0.00 ... 60.00 V		
Resolution	0.01 V		
Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$		
	61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	0.0 ... 600.0 V		

More specifications online:



Subject to change without notice

CURRENT CLAMP MEASUREMENT
ELECTRICAL TESTER

PCE-DC 25

Current measurement 0 ... 1000 A AC/DC / Electrical tester with Bluetooth interface

The electrical tester has a measuring range of 0... 1000 A AC/DC. The current is measured inductively using the clamp on the measuring device. Live supply lines with a diameter of up to 32 mm (1.2") can be connected to the clamp meter. With the optional Rogowski coil, the measuring range of the clamp meter can be extended to up to 3000 A AC. The clamp meter has sub-functions for current measurement. The

inrush current can be measured with the clamp meter. This is a particularly important function, as motors such as those installed in ventilation systems or hall lighting require a particularly high current when switched on. The electrical tester can be connected to an Android or iOS device via the Bluetooth interface.

ISO cal option

- » measuring range 0 ... 1000 A AC/DC
- » bluetooth interface
- » inrush current measurement
- » not Connected Voltage function
- » LC colour display
- » optionally with ISO certificate



APPLICATION



TECHNICAL SPECIFICATIONS

Storage space	16 groups with a total storage space of 100,000 measured values	Resolution	0.1 V
Clamp diameter horizontal	38 mm / 1.49"	Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$
Clamp diameter vertical	63 mm / 2.48"		61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$
Clamp opening	45 mm / 1.77"	Measuring range	0 ... 1500 V
Protection class	IP65	Resolution	1 V
Interface	Bluetooth 4.0	Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$
Pollution degree	2		61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$
Insulation categories	CAT IV 600 V, CAT III 1000 V, CAT II 1500 V	AC voltage with low input impedance (LowZ)	
Maximum working height	2000 m / 6562 ft	Measuring range	0.000 ... 6.000 V
Power supply battery	7.4 V, 1200 mAh Li-ion battery	Resolution	0.001 V
Power supply charger	Primary: 100 ... 240 V AC, 50 ... 60 Hz Secondary: 12 V DC, 2 A	Accuracy	$\pm(3.0\% \text{ of measured value} + 40 \text{ digits})$
Plug connection charger	Europa, USA, England, China available	Measuring range	0.00 ... 60.00 V
Battery status display	switched off, 15, 30 or 60 minutes	Resolution	0.01 V
Automatic switch-off	2.36" TFT	Accuracy	$\pm(3.0\% \text{ of measured value} + 40 \text{ digits})$
Display	3 Hz	Measuring range	0.0 ... 300.0 V
Display frequency	18 ... 28 °C, 64 ... 82 °F; <80 % RH, non-condensing	Resolution	0.1 V
Reference conditions	275 x 100 x 45 mm / 10.8 x 3.9 x 1.7"	Accuracy	$\pm(3.0\% \text{ of measured value} + 40 \text{ digits})$
Dimensions	481 g / 16.9 oz	DC and AC voltage (50 1 kHz)	
Weight		Measuring range	0.000 ... 6.000 V
DC voltage		Resolution	0.001 V
Measuring range	$\pm 600.0 \text{ mV}$	Accuracy	$\pm(2.5\% \text{ of measured value} + 40 \text{ digits})$
Resolution	0.1 mV	Measuring range	0.00 ... 60.00 V
Accuracy	$\pm(0.8\% \text{ of measured value} + 8 \text{ digits})$	Resolution	0.01 V
Measuring range	$\pm 6.000 \text{ V}$	Accuracy	$\pm(2.5\% \text{ of measured value} + 40 \text{ digits})$
Resolution	0.001 V	Measuring range	0.0 ... 600.0 V
Accuracy	$\pm(0.5\% \text{ of measured value} + 5 \text{ digits})$	Resolution	0.1 V
Measuring range	$\pm 60.00 \text{ V}$	Accuracy	$\pm(2.5\% \text{ of measured value} + 40 \text{ digits})$
Resolution	0.01 V		
Accuracy	$\pm(0.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	$\pm 600.0 \text{ V}$		
Resolution	0.1 V		
Accuracy	$\pm(0.8\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	$\pm 1500 \text{ V}$		
Resolution	1 V		
Accuracy	$\pm(0.8\% \text{ of measured value} + 5 \text{ digits})$		
AC voltage			
Measuring range	0.000 ... 6.000 V		
Resolution	0.001 V		
Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$ 61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	0.00 ... 60.00 V		
Resolution	0.01 V		
Accuracy	50 ... 60 Hz: $\pm(1.2\% \text{ of measured value} + 5 \text{ digits})$ 61 ... 1 kHz: $\pm(2.5\% \text{ of measured value} + 5 \text{ digits})$		
Measuring range	0.0 ... 600.0 V		

More specifications online:



Subject to changewithout notice

THICKNESS MEASUREMENT
THICKNESS METER

PCE-TG 75

Material thickness measurement up to 225 mm

The thickness meter can measure material thicknesses up to 225 mm / 8.85". So that the material thickness of a wide variety of homogeneous materials can be measured, it is possible to store the corresponding speed of sound in the thickness meter. For materials such as steel, aluminum, zinc, silver and gold, the appropriate sound speeds are already stored in the device library. This means that the thick-

ness meter can be used universally. With the limit value function in the thickness meter, individual maximum and minimum values can be stored. If the measured value of the test piece is outside the limits, the thickness meter signals this visually.

ISO cal option

- » measured value memory
- » calibration reference on the housing
- » automatic shutdown
- » material thickness measurement up to 225 mm / 8.85"
- » battery status indicator
- » optionally with ISO calibration certificate



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	1.00 ... 225.0 mm / 0.04 ... 8.85"
Resolution	0.01 mm at ≤99.99 mm 0.1 mm at ≥100.0 mm
Accuracy	±0.5 % of measured value + 0.05 mm
Storage space	500 measured values
Probe frequency	5 MHz
Standard sensor	sensor PCE-TG 5M10d
Further specifications	
Adjustable speed of sound	1000 ... 9999 m/s
Smallest pipe diameter	Ø 20 x 3 mm (steel)
Material library	15 memory locations
Calibration reference	4 mm
Display	2.4 inch TFT LCD color display with brightness adjustment
Power supply	3 x 1.5 V AA batteries
Automatic switch-off	switched off, 2, 5, 10, 30 minutes
Ambient conditions	0 ... 40 °C / 32 ... 104 °F, <90 % RH, non-condensing
Dimensions	163 x 82 x 38 mm / 6.4 x 3.2 x 1.5"
Weight	320 g / 11.2 oz

Optional accessories:

Standard probe for the PCE-TG 75/150	Order no.: PCE-TG 5M10d
--------------------------------------	-------------------------



Subject to changewithout notice

THICKNESS MEASUREMENT

MATERIAL THICKNESS METER

PCE-TG 150

Material thickness meter up to 300 mm

The thickness meter can measure material thicknesses up to 300 mm / 11.81". So that the material thickness of a wide variety of homogeneous materials can be measured, it is possible to store the corresponding speed of sound in the thickness meter. For materials such as steel, aluminum, zinc, silver and gold, the appropriate sound speeds are already stored in the device library. This means that the thick-

ness meter can be used universally. With the limit value function in the thickness meter, individual maximum and minimum values can be stored. If the measured value of the test piece is outside the limits, the thickness meter signals this visually.

ISO cal option

- » measured value memory
- » calibration reference on the housing
- » automatic shutdown
- » material thickness measurement up to 300 mm / 11.81"
- » battery status indicator
- » optionally with ISO calibration certificate



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	1.00 ... 300.0 mm / 0.04 ... 11.81"
Resolution	0.01 mm at ≤99.99 mm 0.1 mm at ≥100.0 mm
Accuracy	±0.5 % of measured value +0.05 mm
Storage space	1500 measured values
Probe frequency	5 MHz / 2.5 MHz
Standard sensor	sensor PCE-TG 5M10d
Further specifications	
Adjustable speed of sound	1000 ... 9999 m/s
Smallest pipe diameter	Ø 20 x 3 mm (steel)
Material library	15 memory locations
Calibration reference	4 mm
Display	2.4 inch TFT LCD color display with brightness adjustment
Power supply	3 x 1.5 V AA batteries
Automatic switch-off	switched off, 2, 5, 10, 30 minutes
Ambient conditions	0 ... 40 °C / 32 ... 104 °F, <90 % RH, non-condensing
Dimensions	163 x 82 x 38 mm / 6.4 x 3.2 x 1.5"
Weight	320 g / 11.2 oz

Further Model:

PCE-TG 150 HT	Probe frequency 5 MHz
---------------	-----------------------

PCE-TG 150 F2.5	Probe frequency 2.5 MHz
-----------------	-------------------------

Optional accessories:

2.5 Mhz sensor	Order no.: PCE-TG 2.5M
High temperature sensor	Order no.: PCE-TG HT
Miniature sensor	Order no.: PCE-TG 5M6d
Standard probe for the PCE-TG 75/150	Order no.: PCE-TG 5M10d



Subject to changewithout notice

THICKNESS MEASUREMENT
WALL THICKNESS GAUGE

PCE-TG 300 SERIES WITH BLUETOOTH

With a wide measuring range of up to 600 mm

The PCE-TG 300 is a wall thickness gauge with special probes for various applications. In general, the wall thicknesses of all homogeneous materials can be measured with the PCE-TG 300. For damping or scattering materials such as plastic or cast iron, a special probe is available. An angled 90 ° probe also enables measurements at hard-to-reach measuring positions. The speed of sound can be set freely


and thus adapted to a wide variety of materials. The measured values are displayed directly on the easy-to-read TFT colour display.

ISO cal option

- » wide measuring range
- » various probes available
- » battery operation
- » fault and cavity detection
- » internal measurement data memory
- » printing via Bluetooth



APPLICATION

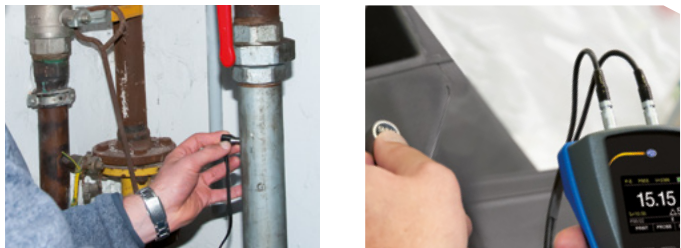

TECHNICAL SPECIFICATIONS

Measuring range	PE: pulse-echo mode 0.65 ... 600 mm (steel)
Accuracy	±0.04 mm H [mm] (< 10 mm); ±0.4 % H [mm] (> 10 mm) H refers to the material thickness of the
workpiece	
Resolution	0.1 mm / 0.01 mm / 0.001 mm (adjustable)
Measurable materials	Metals Plastics Ceramics Epoxy resin Glass and all homogeneous materials
Working modes	Pulse echo mode (fault and cavity detection) Echo-Echo mode (hiding layer thicknesses, e.g. lacquers)
Calibration	Sound velocity calibration Zero point calibration Two-point calibration
View mode	Normal mode, scan mode, difference mode
Units	mm / inch
Data transfer	Printing via Bluetooth / USB 2.0
Memory	Non-volatile memory with 100 data groups with 100 data sets each
Operating time	Continuous operation 100 h Automatic stand-by mode (adjustable) Automatic power off mode (adjustable)
Power supply	4 x AA battery 1.5 V
Display	320 x 240 pixel TFT LCD colour display with brightness adjustment
Operating conditions	0 ... 50 °C / 32 ... 122 °F, ≤80 % RH non condensing
Storage conditions	-20 ... 70 °C / -4 ... 158 °F, ≤80 % RH non-condensing
Dimensions	185 x 97 x 40 mm / 7.3 x 3.8 x 1.6 in
Weight	375 g / < 1 lb

Models

PCE-TG 300-P5EE	
Frequency	5 MHz
Diameter	10 mm
Measurement range	P-E: 2 ... 600 mm, E-E: 2,5 ... 100 mm
diameter	20 x 3 mm
Description	normal measurement and E-E test
PCE-TG 300-N02	
Frequency / Ø	(not suitable for curved materials) 2.5 MHz / 14 mm
Measurement range	3 ... 40 mm (steel) 3 ... 300 mm (steel)
Description	For damping / scattering materials (plastics, cast iron)

PCE-TG 300-N05	
Frequency / Ø	5 MHz / 10 mm
Measurement range	1 ... 600 mm (steel)
Minimum pipe diameter	20 x 3 mm
Description	normal measurement
PCE-TG-300-N05/90 N05 / 90 °	
Frequency / Ø	5 MHz / 10 mm
Measurement range	1 ... 600 mm (steel)
Minimum pipe diameter	20 x 3 mm
Description	normal measurement
PCE-TG 300-N07	
Frequency / Ø	7 MHz / 6 mm
Measurement range	0.65 ... 200 mm (steel)
Minimum pipe diameter	15 x 2 mm
Description	for thin-walled or strongly curved pipes
PCE-TG 300-HT5	
Frequency / Ø	5 MHz / 12 mm
Measurement range	1 ... 600 mm (steel)
Minimum pipe diameter	30 mm
Description	for high temperatures (max. 300 °C)



Subject to changewithout notice

THICKNESS MEASUREMENT
COATING THICKNESS GAUGE

PCE-CT 65

For measuring the colour thickness on ferrous and non-ferrous metals

PCE-CT 65 is a coating thickness gauge that uses magnetic induction (ferrous) or eddy current (non-ferrous) to take non-destructive measurements of coating and dry film thickness (DFT) on metal substrates such as steel and aluminum. This thickness gauge is ideal for painted and powder-coated surface testing, automotive paint inspection, coated material testing, and manufacturing quality control

ISO cal option

- » for ferrous and non-ferrous metals
- » immediately ready to measure
- » large measuring range
- » measured value memory for up to 1500 measurements
- » two measuring modes
- » comfortable one-hand operation
- » comes with storage case
- » calibration plates for accuracy testing



APPLICATION



TECHNICAL SPECIFICATIONS

Ferrous metals	
Principle	Magnetic induction
Measuring range	0 ... 1350 µm / 0 ... 53.1 mils
Accuracy	0 ... 1000 µm: (±2.5 % ±2 µm) 1000 µm ... 1350 µm: ±3.5 % 0 ... 39.3 mils: (±2 % ±0.08 mils) 39.3 mils ... 53.1 mils: ±3.5 %
Resolution	0 ... 100 µm: 0.1 µm 100 µm ... 1000 µm: 1 µm in 1000 mm ... 1350 µm: 0.01 mm 0 ... 10 mils: 0.01 mils 10 mils ... 53.1 mils: 0 ... 1 mils
Smallest surface	Ø 7 mm / Ø 0.3 in
Min. curvature radius	1.5 mm / 0.05 in
Min. substrate thickness	0.5 mm / 0.02 in
Non-ferrous metals	
Principle	Eddy current
Measuring range	0 ... 1350 µm / 0 ... 53.1 mils
Accuracy	0 ... 1000 µm: ±(2.5 % ±2 µm) 1000 µm ... 1350 µm: ±3.5 % 0 ... 39.3 mils: ±(2 % ±0.08 mils) 39.3 mils ... 53.1 mils: ±3.5 %
Resolution	0 ... 100 µm: 0.1 µm 100 µm ... 1000 µm: 1 µm in 1000 mm ... 1350 µm: 0.01 mm 0 ... 10 mils: 0.01 mils 10 mils ... 53.1 mils: 0 ... 1 mils
Smallest surface	Ø 5 mm / Ø 0.2 in
Min. curvature radius	3 mm / 0.1 in
Min. substrate thickness	0.3 mm / 0.01 in
Units	µm, mils
Functions	Alarm function, display lighting, automatic shutdown, calibration, memory function
Memory option	30 storage groups with a capacity of 50 measurements each = 1500 measurements total
Interface	USB
Environmental conditions	0 ... 40 °C / 32 °F ... 104 °F, 20 % ... 90 % rh
Power supply	2 x 1.5 V AAA batteries



Subject to changewithout notice

THICKNESS MEASUREMENT

COATING THICKNESS GAUGE

PCE-CT 26FN

For iron and non-ferrous substrates

The coating thickness gauge PCE-CT 26FN can measure non-destructive coatings (paints, plastics ...) on steel / iron and non-ferrous metals. The coating thickness gauge is ideally suited, for example, to detect accidental damage to the vehicle immediately. But also in the industrial sector, the PCE-CT 26FN coating thickness gauge is used for incoming and outgoing inspection in order to be able to offer consistently

consistent product qualities. The ergonomically shaped coating thickness gauge with integrated probe and very simple operation allows you to quickly determine measurement results with high accuracy.

ISO cal option

- » immediately ready to measure
- » wear-resistant sensor
- » V-groove for measurement on pipes
- » one-handed operation
- » ISO calibration optional
- » incl. transport case



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	0 ... 1250 µm (0 ... 49.2 mils)
Resolution	1 µm (0.039 mils)
Accuracy	±(3 % + 2 µm) or ± (3 % + 0.079 mils)
Smallest measuring surface	5 x 5 mm / 0.2 in x 0.2 in
Smallest radius of curvature	Convex: 3 mm (0.1 in) / concave: 50 mm (2 in)
Smallest thickness of the base material	Fe: at least 0.5 mm / 0.02 in NFe: at least 0.3 mm / 0.01 in
Display	OLED display
Ambient temperature	0 ... 50 °C / 32 ... 120 °F
Power supply	2 x AAA battery 1.5 V
Dimension	100 x 52 x 29 mm / 4 x 2 x 1.1 in
Weight	About 68 g / <1 lb (without batteries)



Subject to changewithout notice

THICKNESS MEASUREMENT
COATING THICKNESS GAUGE

PCE-CT 29

Measuring range of 0 ... 2000 µm / Micro-USB / visual and acoustic alarm

The material tester has a measuring range of 0 ... 2000 µm. The material tester can measure the coating thickness on ferrous (Fe) and non-ferrous (NFe) metals.
For a better analysis of the measurements, the coating thickness gauge has a measuring function based on the SSPC standards. With this function, the corrosion protection of a coating can be checked

with the material tester. The group function stores the measured values directly. A memory of 50 groups with 50 measurements each is available. In each group, statistics are created for all measured values from the material tester. All measurement data and statistics can be recalled after a measurement run.

ISO cal option

- » measuring range 0 ... 2000 µm
- » with SSPC measuring function
- » individually adjustable limit value alarms
- » data memory with up to 2500 measured values
- » temperature and humidity measuring function
- » optionally with ISO calibration certificate



APPLICATION



TECHNICAL SPECIFICATIONS

Measurement on ferrous metal (Fe)		Operating conditions	0 ... 50 °C, 20 ... 90 % r.h., non-condensing
Measuring range	0 ... 2000 µm	Storage conditions	-10 ... +60 °C, 20 ... 90 % r.h., non-condensing
Resolution	0.1 µm @ 0.0 ... 99.9 µm 1 µm @ 100 ... 2000 µm	Dimensions	35 x 64 x 137 mm
Accuracy	±(2 % ±2 µm of Mw.)	Weight	175 g
Repeatability	±(1 % ±1 µm of Mw.)		
Smallest radius of curvature	1.5 mm		
Smallest measuring area	Ø 7 mm		
Smallest layer thickness	0.5 mm		
Measurement on non-ferrous metal (NFe)			
Measuring range	0 ... 2000 µm		
Resolution	0.1 µm @ 0.0 ... 99.9 µm 1 µm @ 100 ... 2000 µm		
Accuracy	±(2 % ±2 µm of Mw.)		
Repeatability	±(1 % ±1 µm of Mw.)		
Smallest radius of curvature	3 mm		
Smallest measuring area	Ø 5 mm		
Smallest layer thickness	0.3 mm		
Temperature			
Measuring range	0 ... 50 °C / 32 ... 122 °F		
Resolution	0.1 °C / °F		
Accuracy	±1.2 °C / ±2.2 °F		
Humidity			
Measuring range	0 ... 100 % r. h.		
Resolution	0.1 % r. h.		
Accuracy	±3.2 % r. h. @ 20.0 ... 70.0 % r. h. ±4.0 % r. h. @ 0.0 ... 19.9 % r. h. ±4.0 % r. h. @ 70.1 ... 100.0 % r. h.		
Further specifications			
Base material for measurements	Ferrous (Fe) and non-ferrous (NFe) metals		
Display	2.4 " LC display		
Automatic display orientation	0, 90, 180 and 270 °, can be switched off (only measuring window)		
Statistic functions	average, highest, lowest and SDEV measured value		
Measuring modes	direct, groups, SSPC		
Units	µm, mm, mils, inch		
Power supply	2 x 1.5 V AA batteries		
Interface	Micro-USB (for data transfer only)		
Alarm	signal tone and / or LED signal light in case of Exceeding of the adjustable upper and lower alarm		
limit			
Switch-off	Off, 30 seconds, 1 minute, 5 minutes		
Menu languages	English, German, French, Spanish, Italian, Portuguese, Chinese, Japanese		



Subject to changewithout notice

THICKNESS MEASUREMENT

COATING THICKNESS GAUGE

PCE-CT 80 SERIES

Paint layer thickness gauge for Fe and NFe

The paint layer thickness gauge PCE-CT 80 is a measuring device for the non-destructive measurement of coatings (lacquers, paints, plastics ...) on steel / iron and non-ferrous metals. Thanks to the externally connected sensor on the PCE-CT 80 paint coating thickness gauge, even difficult-to-reach measuring locations can be easily reached. The menu navigation of the paint thickness gauge allows easy adjust-

ment and setting to new parameters and makes this handy paint coating thickness gauge an indispensable tool for control measurements in production, workshop and quality assurance.

ISO cal option

- » for many materials such as iron, steel, aluminium, copper, brass and stainless steel
- » measurements cannot be influenced by vibrations
- » practical V-groove on the measuring heads
- » internal data memory
- » warning for measurements exceeding the measuring range
- » wear-resistant, spring-mounted measuring head for precise measurement results
- » all PCE-CT 80 HP models feature a particularly high accuracy



APPLICATION



TECHNICAL SPECIFICATIONS

Measurement range	Fe: 0 ... 5000 µm / 0 ... 196.9 mils (depending on probe) NFe: 0 ... 3000 µm / 0 ... 118.1 mils (depending on probe)
Accuracy PCE-CT 80 Serie PCE-CT 80 HP Serie	±(2 % v. Mw. + 1 µm) ±(1 % v. Mw. + 1 µm)
Resolution	0.1 µm (<100 µm) 1 µm (>100 µm)
Measurable materials	Non-magnetic layers on steel, iron, ... Non-electrically conductive layers on aluminium, copper, ...
Min. radius of curvature convex Min. radius of curvature concave Min. measuring surface Min. layer thickness	5 mm 25 mm Ø 17 mm 0.2 mm (on magnetic materials) 0.05 mm (on non-magnetic materials)
Probe mode	Autom. mode with material detection (Fe + NFe) Magnetic mode (Fe) Eddy current mode (NFe)
Measurement modes	Single measurement Continuous measurement
Calibration	Multipoint calibration (1 ... 4 points for each group) zero point calibration
Units	µm, mm, mils
Data transfer	USB 2.0
Memory	One volatile measuring group (DIR mode) Four measuring groups with autom. storage and max. 2000 readings (GEN mode)
Statistical functions	Number of measured values, mean, minimum, maximum, standard deviation
Alarm	Display when the adjustable upper and lower alarm limits are exceeded
Operating time	Auto Power Off mode (3 min)
Power supply	3 x 1.5 V AAA batteries
Display	128 x 128 px LCD
Displayed information	Battery status / flaw detection
Operating conditions	0 ... 50 °C / 32 ... 122 °F / 20 ... 90 % RH not condensing
Storage conditions	-10 ... 60 °C / 14 ... 140 °F / 20 ... 90 % RH not condensing
Dimensions	143 x 71 x 37 mm / 5.6 x 2.8 x 1.5 in (L x W x H)
Weight	with sensor and batteries: approx. 271 g / <1 lb
Models:	
PCE-CT 80-F5N3	Measurement range: Fe: 0 ... 5000 µm, NFe: 0 ... 3000 µm
PCE-CT 80-FN0D5	Measurement range: Fe: 0 ... 500 µm, NFe: 0 ... 500 µm
PCE-CT 80-FN1D5	Measurement range: Fe: 0 ... 1500 µm, NFe: 0 ... 1500 µm
PCE-CT 80-FN2	Measurement range: Fe: 0 ... 2000 µm, NFe: 0 ... 2000 µm
PCE-CT 80-FN2D5	Measurement range: Fe: 0 ... 2500 µm, NFe: 0 ... 2500 µm
PCE-CT 80-FN3	Measurement range: Fe: 0 ... 3000 µm, NFe: 0 ... 3000 µm
PCE-CT 80HP-F5N3	Measurement range: Fe: 0 ... 5000 µm, NFe: 0 ... 3000 µm
PCE-CT 80HP-FN0D5	Measurement range: Fe: 0 ... 500 µm, NFe: 0 ... 500 µm
PCE-CT 80HP-FN1D5	Measurement range: Fe: 0 ... 1500 µm, NFe: 0 ... 1500 µm
PCE-CT 80HP-FN2	Measurement range: Fe: 0 ... 2000 µm, NFe: 0 ... 2000 µm
PCE-CT 80HP-FN2D5	Measurement range: Fe: 0 ... 2500 µm, NFe: 0 ... 2500 µm
PCE-CT 80HP-FN3	Measurement range: Fe: 0 ... 3000 µm, NFe: 0 ... 3000 µm



Subject to changewithout notice

FORCE MEASUREMENT
FORCE GAUGE

PCE-DFG N 10K

With external measuring cell and USB interface for connection to a PC

The force gauge measures both tensile and compressive forces with a very high resolution. Tensile and compressive forces are often measured in test laboratories, for example to determine the yield strength, the pull-off force and the force required to actuate a push-button or switch. The force gauge is supplied with an external measuring cell. The PCE-DFG N 10K force gauge can measure up to 10,000 N /


2,248 lbs. Models for 1,000 N / 225 lbs, 2,500 N / 562 lbs and 5,000 N / 1,124 lbs are also available. Various eyelets or hooks with M10 or M12 threads can be screwed into the measuring cells but other devices with the same thread can also be attached to the measuring cell.

ISO cal option

- » USB interface
- » memory capacity for 100 measurements
- » incl. ISO calibration certificate
- » graphical display
- » fast response time
- » PC software



APPLICATION



TECHNICAL SPECIFICATIONS

Measurement range	0 ... 10,000 N / 0 ... 2,248 lbs
Resolution	5 N
Accuracy	±0.1 % of the measuring range
Units	N, kg, lb, KPa
Display	2.8 " TFT graphical display
Alarm modes	inside, outside, crack, shutdown
Sampling rate	6 ... 1600 Hz
Memory	100 measurements, 8000 values each
Power supply	rechargeable NiMH battery, 6 V / 1600 mAh
Battery life	approx. 10 h
Mains / charging adaptor	12 V / 1 A
Outputs	Interface: USB
Protection class	Switching output: 12 V / 50 mA
Operating and storage conditions	IP 54
	-10 ... 50 °C / 14 ... 122 °F
	5 ... 95 % RH non-condensing
Mounting thread measuring cell	
up to 1000 N / 225 lbs	M10
2500 ... 10000 N / 562 ... 2,248 lbs	M12
Dimensions	200 x 97 x 42 mm / 7.9 x 3.8 x 1.7
Weight	540 g / 1.2 lbs

Optional accessories:

Clamping device for tensile tests	Order code	PCE-SJJ012
Fork holder for tensile & compr. tests	Order code	PCE-SJJ09
Adaptor clamp for tensile tests	Order code	PCE-SJJ06
Round adaptor stamp for compr. tests	Order code	PCE-SJJ04
Adaptor for compr. tests	Order code	PCE-SJJ01
Clamping device for test stand	Order code	PCE-SJJ015

Further models of the PCE-DFG N series:

PCE-DFG N 5	internal measuring	cell meas. range	0 ... 5 N
PCE-DFG N 10	internal measuring	cell meas. range	0 ... 10 N
PCE-DFG N 20	internal measuring	cell meas. range	0 ... 20 N
PCE-DFG N 200	internal measuring	cell meas. range	0 ... 200 N
PCE-DFG N 500	internal measuring	cell meas. range	0 ... 500 N
PCE-DFG N 1K	external measuring	cell meas. range	0 ... 1000 N / 100 kg
PCE-DFG N 2,5K	external measuring	cell meas. range	0 ... 2500 N / 250 kg
PCE-DFG N 5K	external measuring	cell meas. range	0 ... 5000 N / 500 kg
PCE-DFG N 20K	external measuring	cell meas. range	0 ... 20000 N / 2 t
PCE-DFG N 50K	external measuring	cell meas. range	0 ... 50000 N / 5 t
PCE-DFG N 100K	external measuring	cell meas. range	0 ... 100000 N / 10 t



Subject to changewithout notice

FORCE MEASUREMENT

FORCE GAUGE

PCE-DFG N 500

Digital force gauge for tensile and compressive force measurement up to 500 N

The PCE-DFG N 500 is a digital force gauge for tensile and compressive force measurement up to 500 N. It has a resolution of 0.1 N. The measured values are shown on a large display with backlight which is rotatable by 180 °. Therefore, reading the measured values correctly is possible in any position and at any time. The outstanding accuracy of ±0.1 % f. s. is confirmed by the factory calibration certificate that


comes with the meter. In addition to the internal memory with sufficient capacity for 100 readings, a USB interface is available for data transfer.

ISO cal option

- » tensile and compressive force measurement
- » 1600 Hz sampling rate
- » error limit 0.1 % of the measuring range
- » PEAK function (MIN / MAX)
- » limit value function
- » various units of measurement
- » automatic or manual storage
- » graphical evaluation
- » display with automatic orientation
- » time / date
- » control and evaluation software
- » auto power off adjustable
- » battery level indicator
- » mains operation possible
- » memory capacity for 100 measurements



APPLICATION



TECHNICAL SPECIFICATIONS

Measurement range	0 ... 500 N
Accuracy	±0.1 %
Resolution	0.1 N
Units	N, kg, lb, KPa
Display	2.8" TFT graphical display
Alarm modes	inside, outside, crack, shutdown
Sampling rate	6 ... 1600 Hz
Memory	100 measurements, 8000 values each
Power supply	rechargeable NiMH battery 6 V / 1600 mAh
Battery life	approx. 10 h
Charging adaptor	12 V / 1 A
Outputs	Interface: USB Switching output: 12 V / 50 mA
Protection class	IP 54
Operating and storage conditions	-10 ... 50 °C / 14 ... 122 °F 5 ... 95 % RH non-condensing
Force absorption element	M6 x 7 mm
Dimensions	200 x 97 x 42 mm / 7.9 x 3.8 x 1.7 in
Weight	540 g / 1.2 lbs

Further models of the PCE-DFG N series:

PCE-DFG N 5	internal measuring	0 ... 5 N
PCE-DFG N 10	internal measuring	0 ... 10 N
PCE-DFG N 20	internal measuring	0 ... 20 N
PCE-DFG N 200	internal measuring	0 ... 200 N
PCE-DFG N 1K	external measuring	0 ... 1000 N / 100 kg
PCE-DFG N 2,5K	external measuring	0 ... 2500 N / 250 kg
PCE-DFG N 5K	external measuring	0 ... 5000 N / 500 kg
PCE-DFG N 20K	external measuring	0 ... 20000 N / 2 t
PCE-DFG N 50K	external measuring	0 ... 50000 N / 5 t
PCE-DFG N 100K	external measuring	0 ... 100000 N / 10 t

Optional accessories:

Clamp for peel-off tests	Order code	PCE-SJJ035
Holder for button and rivet testing	Order code	PCE-SJJ032
Clamping device for bristle testing	Order code	PCE-SJJ029
Clamping device for bristle testing	Order code	PCE-SJJ020
Clamping device for tensile tests	Order code	PCE-SJJ012
Fork holder for tensile & compr. tests	Order code	PCE-SJJ09
Clamping tool for tensile tests	Order code	PCE-SJJ08
Clamping device for tensile tests	Order code	PCE-SJJ07
Adaptor clamp for tensile tests	Order code	PCE-SJJ010
Adaptor clamp for tensile tests	Order code	PCE-SJJ06
Round adaptor stamp for compr. tests	Order code	PCE-SJJ04
Adaptor for compr. tests	Order code	PCE-SJJ01
Motorised force test stand	Order code	PCE-MTS50
Force test stand	Order code	PCE-FTS50
Clamping device for test stand	Order code	PCE-SJJ03
Adaptor ring for tensile tests	Order code	PCE-SJJ02
Clamping device for test stand	Order code	PCE-SJJ024
Clamping device for test stand	Order code	PCE-SJJ015
Clamping jaw for test stand	Order code	PCE-SJJ130
Clamping jaw for PCE-FTS50, PCE-FM 50/200	Order code	PCE-SJJ05
Clamping jaw for test stand PCE-FTS50	Order code	PCE-SJJ011



Subject to change without notice

FORCE MEASUREMENT
FORCE GAUGE

PCE-DFG NF 1K

Measurement of compressive forces with external load cell

The force gauge with an external load cell is designed for the measurement of compressive forces in hard-to-reach measuring locations. The pressure cell is connected to the force gauge by a sensor cable of approx. 3 m length and thanks to the small cell dimensions, it ensures versatile applications. The force gauge/load cell has several threaded holes at the bottom to enable fixed installation. The force gauge can

operate at a sampling rate of up to 1600 Hz. The sampled readings are displayed as an instantaneous value as well as in a graph showing the measurement curve directly in the force gauge.

ISO cal option

- » USB interface
- » graphical display
- » fast response time
- » PC software
- » incl. calibration
- » memory for 100 measurements



APPLICATION



TECHNICAL SPECIFICATIONS

Measurement range	0 ... 1000 N
Resolution	0.1 N
Accuracy	±0.5 % of meas. range
Measurement units	N, kg, lb, kPa
Display	2.8" TFT graphical display
Alarm modes	inside, outside, crack, shutdown
Sampling rate	6 ... 1600 Hz
Memory	100 measurements
Power supply	rechargeable NiMh battery, 6 V / 1600 mAh
Battery life	approx. 10 hours
Power adaptor / charging adaptor	12 V / 1 A
Outputs	interface: USB switching output: 12 V / 50 mA
Protection class	IP 54
Operating and storage conditions	-10 ... 50 °C 5 ... 95 % RH, non-condensing
Dimensions load cell	Ø 20 mm / H 12 mm / M3 thread (see technical drawing)
Cable length pressure cell	approx. 3 m
Dimensions	200 x 97 x 42 mm
Weight	540 g
Further models :	
PCE-DFG NF 0,5K	Measurement range 0 ... 500 N
PCE-DFG NF 2K	Measurement range 0 ... 2000 N
PCE-DFG NF 5K	Measurement range 0 ... 5000 N
PCE-DFG NF 10K	Measurement range 0 ... 10000 N / 0 ... 10 kN
PCE-DFG NF 20K	Measurement range 0 ... 20000 N / 0 ... 20 kN
PCE-DFG NF 50K	Measurement range 0 ... 50000 N / 0 ... 50 kN



Subject to changewithout notice

FORCE MEASUREMENT
DYNAMOMETER

PCE-PFG 500


With internal S load cell

The PCE-PFG dynamometer is a handy, digital measuring device for measuring tensile and compressive forces. The force measuring device offers a sampling rate of 500 Hz and various measurement options such as real-time measurement (RT), maximum value measurement (PEAK), configurable average value acquisition (Average) and automatic measurement storage of up to 100 measurements. The


measurement data and a statistical evaluation of the data stored in the force measuring device (MIN / MAX / average) are shown on the graphic display and can be transferred to a PC via the USB interface. In addition, the force measuring device offers a limit value function MIN / MAX, which can switch a multi-colored LED and switching contacts.

ISO cal option

- » 4 measurement modes (real-time measurement / maximum value / average measurement / automatic memory measurement)
- » internal memory for up to 100 measured values
- » statistics evaluation (MIN / MAX / average)
- » rotatable display
- » alarm function with multi-colored LED (yellow / green / red) and switching contact output 2.85 V.
- » USB B interface
- » battery life up to 36 hours



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	0 ... 500 N
Resolution	0.1 N
Accuracy	±0.3 % of the measuring range
Measurement units	N, kgF, lbf
Display	1.8" graphic display
Alarm modes	Below, Inside, Outside
Sampling rate	500 Hz
Memory	100 measurements
Power supply	lithium battery 3.7 V / 1500 mAh
Battery life	up to 36 hours
Power supply / USB charging adapter	5 V / 1 A
Outputs	interface: USB B Switching output / alarm modes: MD6 with 2.85 V if active
Protection class	IP 54
Operating and storage conditions	5 ... 45 °C 35 ... 65 % r.H. not condensing
Force application	M6 x 10 mm thread
Dimensions	189 x 707 x 34 mm
Weight	450 g

Optional accessories

Hand grip	order code	KG-LTS-20
Mounting adapter for test stand	order code	FG-ADP
Adapters for Pressure Tests	order code	PCE-SJJ01
Adapter Ring for Tensile Tests	order code	PCE-SJJ02
Clamping Device for Test Stand	order code	PCE-SJJ03
Adapter Stamp Round for Pressure Tests	order code	PCE-SJJ04
Clamp Jaw	order code	PCE-SJJ05
Adapter Clamps for Tensile Tests	order code	PCE-SJJ06
Clamping Device for Tensile Tests	order code	PCE-SJJ07
Clamping Tool for Tensile Tests	order code	PCE-SJJ08
Fork Holder for Tensile and Compression Tests	order code	PCE-SJJ09
Adapter Clamp For Tensile Tests	order code	PCE-SJJ010
Clamp Jaw for Teststand	order code	PCE-SJJ011
Tensioning Device for Tensile Tests	order code	PCE-SJJ012
Clamp Jaw for Test stand	order code	PCE-SJJ013
Clamping Device for Test Stand	order code	PCE-SJJ015
Universal Clamping Device	order code	PCE-SJJ017
Clamping Device for Testing Bristles	order code	PCE-SJJ020
Clamping Device for Test Stand	order code	PCE-SJJ024
Clamping Device for Testing Bristles	order code	PCE-SJJ029
Holder for Button and Rivet Testing	order code	PCE-SJJ032
Pliers for Trigger Tests	order code	PCE-SJJ035
Adapter Plate for Force Test Stand	order code	ADP-UNI
Force Test Stand	order code	PCE-FTS50
Force gauge test stand	order code	LTS-20

Further models :

PCE-PFG 10	Measuring range	0 ... 10 N
PCE-PFG 20	Measuring range	0 ... 20 N
PCE-PFG 50	Measuring range	0 ... 50 N
PCE-PFG 100	Measuring range	0 ... 100 N
PCE-PFG 200	Measuring range	0 ... 200 N



Subject to changewithout notice

FORCE MEASUREMENT
FORCE GAUGE

PCE-DFG 2000 SERIES

Measurement range up to 200 kN / sampling rate 2000 Hz

The force gauge PCE-DFG 2000S and the PCE-DFG 2000E is supplied with an external measuring cell. Depending on the model, the force gauge can measure up to 200 kN. Various eyes or hooks with M10 or M12 thread can be adapted into the measuring cells. However, own devices with this thread can be mounted to the measuring cell. The measured data can be stored and exported. Operation is simple and

the evaluation can be used for various analyses, for example in Excel tables. The PCE-DFG 2000I force gauge has an internal load cell and is supplied with five different load cells.

ISO cal option

- » data analysis
- » internal memory for 200 data sets
- » up to 200 kN
- » incl. software
- » 2000 Hz
- » graphic display



APPLICATION



TECHNICAL SPECIFICATIONS

Sampling rate	High speed version 2000Hz
Measurement range	0 ... 20.000 kg / 0 ... 200 kN
Non-linearity	>0,01 %
Display	-99999-999999
Signal input	-15~15 mV
Temperature drift	<20 ppm
Built in battery	3200mAh battery
Battery life	approx. 10 h
Real-time monitoring	automatically capture peak and valley values and analyze sensor status
Memory	up to 200 records
Connection / Interface	USB-C connector
Alarm	signal tone exceeding of the adjustable upper and lower



Subject to changewithout notice

FORCE MEASUREMENT

HYDRAULIC FORCE GAUGE

PCE-HFG SERIES

For the measurement of compression forces in mechanical systems

The hydraulic force transducer PCE HFG series is used for the absorption of static pressure forces and is made of stainless steel. The force transducer can measure forces over a long period of time due to its independence from power sources. With the integrated drag indicator the respective PEAK value is stored for later read out. The force transducer uses the measuring principle of hydraulic transmission of

forces. The forces applied to the plunger are transmitted to the dial gauge via the medium and are displayed on the Newton scale [N]. Due to the 27 mm ring opening, it is also possible to use the force transducer axially and to determine axial shaft forces, for example.

ISO cal option

- » measurement of static pressure forces
- » for stationary maintenance measurements and adjustment work
- » independent of power sources
- » analogue meter scale
- » compact for small installation spaces
- » pressure force display in kilonewtons [kN]
- » stainless steel
- » integrated drag indicators



APPLICATION



TECHNICAL SPECIFICATIONS

Models of the PCE-HFG series:

Measured value: Force [N]

Measuring range	
PCE-HFG 1K	0... 1000 N
PCE-HFG 2.5K	0... 2500 N
PCE-HFG 10K	0... 10000 N
PCE-HFG 25K	0... 25000 N

Models with 1 m long hydraulic hose

PCE-HFG 1K E100	01000 N
PCE-HFG 2.5K E100	0 ... 2500 N
PCE-HFG 10K E100	0 ... 10000 N
PCE-HFG 25K E100	0 ... 25000 N

Resolution:

PCE-HFG 1K	20 N
PCE-HFG 2.5K	100 N
PCE-HFG 10K	200 N
PCE-HFG 25K	1000 N

Accuracy: ±(1.6 % pressure gauge +0.25 % reading error)
from measuring range

Temperature range: 0... 50 °C

weight: 1.6 kg

Mounting holes: 2 x M6

Inner diameter of the ring: Ø 27 mm

Display dimensions: Ø 55 mm



Subject to changewithout notice

FORCE MEASUREMENT
TORQUE METER

PCE-DFG N 100TW

Torque meter up to 100 Nm / external torque transducer 1/2 " internal square

The torque wrench tester consists of a handheld measuring device and an external torque transducer. The torsion transducer is connected to the hand-held device via a 1.5 m / 4.9 ft long cable and thus enables installation in a test stand or direct assembly on a test bench. The torque measuring device is delivered adjusted so that the control measurements can be started immediately. A calibration certificate is

optionally available for the torque measuring device. This certificate is a target / actual comparison on a traceable reference standard and thus serves as proof of the measurement accuracy. The measurement uncertainty of the torque measuring device is only 0.5 % of the measuring range.

ISO cal option

- » left / right torsion measurement
- » error limit 0.5 % of the measuring range
- » graphic display
- » PC software
- » PEAK / Hold function
- » 1600 Hz sampling rate
- » power adapter and battery operation possible
- » the direction of rotation must be selected



APPLICATION



TECHNICAL SPECIFICATIONS

Measuring range	0 ... 100 Nm
Resolution	0.1 Nm
Accuracy	±0.5 % of the measuring range
Units of measurement	Nm, lbfft, kgfm
Torque sensor mount	1/2" (12.5 x 12.5 mm) internal square
Torsion measurement	Left / Right
Display	2.8" TFT graphic display
Alarm modes	Inside Outside
Sampling rate	6 ... 1600 Hz
Storage measurement points each	for 100 measurement series with 8,000
Power supply	NiMh battery, 6 V / 1600-mAh
Battery life	About 10 hours
Power supply / charging adapter	12 V / 1 A
Outputs	Interface: USB Switching output: 12 V / 50-mA
Protection class	IP 54
Operating and storage conditions	-10 ... 50 °C / 14 ... 122 °F 5 ... 95 % RH non-condensing
Torque transducer dimensions	H 85 mm / Ø 72 mm / Ø 104 mm (H 3.3 in / Ø 2.8 in / Ø 4.1 in) (see technical drawing)
Sensor cable length / td>	Approx. 1.5 m / 4.9 ft
Dimensions handset	200 x 97 x 42 mm / 7.9 x 3.8 x 1.7 in
Weight handset	540 g / 1.2 lbs
Weight of the torsion transducer	985 g / 2.2 lbs

Further models of the PCE-DFG N TW series:

PCE-DFG N 50TW	Measuring range 0 ... 50 Nm
PCE-DFG N 10TW	Measuring range 0 ... 10 Nm
PCE-DFG N 5TW	Measuring range 0 ... 5 Nm



Subject to changewithout notice

FM300-SY-25-750

Closing force measurement system for elevator doors

The closing force measuring device is an electronic measuring device for elevator doors and protective devices on machines. Typical use is both the final acceptance of new systems and regular inspection. Its uncompromising design combines precision with practical robustness and ensures accurate measured values even after years of use in

harsh environments. In the case of cyclical measurements on objects with several elevators, a quick and easy implementation is of great importance. For this purpose, software was developed that drastically reduces the measurement process and the effort required for documentation.

ISO calibrated

- » precise measurements
- » robust design
- » easy handling - operation with a single control button or remotely controlled via Microsoft® DLL - interface or National Instruments® LabView library
- » complete scope of delivery - including high-quality transport case and software
- » professional, comprehensive PC software - PinchPilot
- » comprehensive user support - calibration service, standard change service ensures the
- » support of relevant standards - EN 81-1, EN 81-2, EN 81-20:2014, EN 81-50:2015, EN 14120
- » application of the latest version of the standard
- » software support - integration into existing software structures possible
- » extensive systems can be measured in one run
- » measured value acquisition module saves up to
- » 100 measurements



APPLICATION



TECHNICAL SPECIFICATIONS

FM300-SY-25-750	
Measuring range	0 ... 750 N
Accuracy	+/- 3 N or 3 % of reading
Stiffness	25 N/mm
Gap width	145-510 mm / 5.7-20"
Diameter	58 mm / 2.2"
Measuring principle	DMS transducer
Dimensions	290 x 140 x 60 mm / 11.4 x 5.5 x 2.3"
Weight	1.7 kg / 3.7 lb
Stiffness	25 N/mm

- Display device SEB2**
- Display device SEB2 data logger unit with LCD display and LED status indicators, control button, serial interface
 - Optional PC-controlled measurement
 - 9 V battery supply
 - Real time clock
 - Memory for 100 measurements
 - Sensor and PC interface
 - Peak display
 - Rating display i. O./n. i. O.
- PC evaluation software PinchPilot**
- Multilingual (DE, EN, IT, FR, ES)
 - Graphic representation of the force curve
 - Calculation of the standard-relevant characteristic values
 - Evaluation according to different guidelines possible
 - Custom policy adjustable
 - Log printout
 - Data export (Excel, CSV, PDF)
 - Optional measuring point identification
- System requirements software PinchPilot (see tab Software/App)

Other model:
FM300BT-SY-25-750 **Bluetooth**



Subject to changewithout notice

CLOSING FORCE MEASURING
CLOSING FORCE MEASURING DEVICE



ORIGINAL BIA CLASS 1-SY-10-310

Closing force measurement system for bus and train doors and sliding steps

The original BIA class 1 closing force measuring device is an electronic closing force measuring device for rail vehicle and bus doors. The elaborate design combines precision with practical robustness and ensures accurate measured values even after years of use in harsh environments. For cyclic measurements on vehicles with multiple doors, a quick and easy implementation is of great importance. For

this purpose, software was developed that drastically reduces the measurement process and the effort required for documentation. With just a few operating steps, the measurements for a complete vehicle can be taken over, printed out in tabular form and saved in a database.

ISO calibrated

- » applicable standards – EN 14752:2005, VDV 111, 2001/85/EG
- » operation with a single button or remotely via Microsoft® DLL interface or National instruments® LabView library
- » complete scope of delivery -including high-quality transport case and software
- » professional, comprehensive PC software – PinchPilot
- » comprehensive user support -calibration service, standard change service
- » support for the management of large fleets



APPLICATION



TECHNICAL SPECIFICATIONS

BIA1-SY-10-310	
Measuring range	25 ... 310 N
Accuracy	+/- 3 N or 3% of reading
Resolution	1 N
Stiffness	10 N/mm
Gap width	115 mm / 4.5"
Diameter	100 mm / 3.9"
Measuring principle	DMS transducer
Acquisition frequency / rate	250 Hz / 4 ms
Power supply	battery 9 V block, e.g. 6LR61
Battery voltage monitoring	yes
Operating temperature range	-10 to +40 °C / 14 to 104 °F
Storage temperature range	-40 to +50 °C / -40 to 122 °F
Humidity	max. 90% rel. h, non-condensing.
Dimensions	260 x 130 x 115 mm / 10.2 x 5.1 x 4.5"
Weight	2.1 kg / 4.6 lb

Optional accessories:	
Test specimen	Prüfkörpersatz 1-3 Prüfkörper 1 Prüfkörper 2 Prüfkörper 3 Prüfkörper 4 Prüfkörper 5
Test block for manual pre-test	Prüfkörper 143407

- PC evaluation software PinchPilot**
- Multilingual (DE, EN, IT, FR, ES)
 - Graphic representation of the force curve
 - Calculation of the standard-relevant characteristic values
 - Evaluation according to different guidelines possible
 - Custom policy adjustable
 - Log printout
 - Data export (Excel, CSV, PDF)
 - Optional measuring point identification

Other model:
BIA1BT-SY-10-310 **Bluetooth**

- Force Meter App downloadable from Google Play Store**
- Force Meter – easy-to-use app with automatic guidelines and standards updates
 - Time saving - immediate feedback on the measurement result including simpler report generation
 - Paperless office - reduces paper and the associated costs and protects the environment
 - Can be used individually - integration of the customer's signature possible

- System requirements software PinchPilot (see tab Software/App)**
- Display device SEB2.2-AC**
- Data logger unit with LCD display and LED status indicators, control button, serial interface
 - Optional PC-controlled measurement
 - 9 V battery supply
 - Real time clock
 - Memory for 100 measurements
 - Sensor and PC interface
 - Peak value display and effective power display
 - Rating display i. O./n. i. O.



Subject to changewithout notice

CLOSING FORCE MEASURING CLOSING FORCE MEASURING DEVICE



ORIGINAL BIA CLASS 2-SE-10-300

Closing force measurement system for bus and train doors

The original BIA class 2 is a mechanical closing force measuring device for bus doors. The elaborate design combines precision with practical robustness and ensures accurate measured values even after years of use in harsh environments.

Precise measurements are guaranteed by a six-fold ball bearing guide. The housing of the original BIA2 is made of high-strength POM for a long service life in tough conditions. The BIA2 clamping force measuring system is equipped with a mechanical drag indicator which displays the peak value of the force after measurement

ISO calibrated

- » precise measurements
- » robust design
- » easy to use
- » complete scope of delivery - including high-quality transport case
- » extensive user support
- » calibration service



APPLICATION



TECHNICAL SPECIFICATIONS

BIA2-SE-10-300	
Measuring range	50 ... 300 N
Accuracy	+/- 10 N or 5% of reading
Stiffness	10 N/mm or 25 N/mm selectable!
Gap width	115 mm / 4.52"
Diameter	100 mm / 3.93"
Measuring principle	slave pointer
Dimensions	260 x 130 x 115 mm / 10.2 x 5.1 x 4.5"
Weight	2.1 kg / 4.6 lb
Other model:	
BIA2-SE-25-750	Stiffness: 25 N/mm, Measuring range: 25... 750 N



Subject to changewithout notice

CLOSING FORCE MEASURING CLOSING FORCE MEASURING DEVICE

FM100-SY-500-2000

Closing force measuring system for doors and gates

The closing force measuring device is an electronic measuring device for power-operated doors and gates. Typical use is both the final inspection of new installations and regular rechecks. The closing force measuring system combines the well-known robust design for years of use in harsh environments and sustained precision. For cyclical measurements on plants with multiple doors and gates, quick

and easy execution is of great importance. Drive Test has developed software for this purpose that drastically reduces the measurement procedure and the effort required for documentation. TÜV Nord has tested and certified the FM 100 closing force measuring device.

ISO calibrated

- » instantaneous evaluation - according to selected guidelines and standards
- » separate measured value acquisition module
- » process reliability
- » wide temperature operating range
- » language selection - available in DE/ EN/ ES/ FR/IT/ CN
- » user guidance and evaluation according to EN 12453:2017, EN 60335-2, DIN V 18650, ASR A1.7, DHF TS 011:2016 etc.
- » housing made of high-strength material for long service life in heavy-duty use
- » sensor with 2.5 m connection cable
- » PC connection cable (USB)
- » USB data stick with PC evaluation software PinchPilot and documentation



APPLICATION



TECHNICAL SPECIFICATIONS

FM100-SY-500-2000

Measurement Range:	0 ... 2.000 N
Accuracy	+/- 3 N or 3 %
Resolution	1 N
Stiffness:	500 N/mm
Gap width:	50 mm
Diameter:	80 mm
Measuring principle	DMS transducer
Memory	80 measurements
Acquisition frequency/rate	500 Hz / 2 ms
Power supply SEB2	9 V block battery, e.g. 6LR61
Battery voltage monitoring	Yes
Environmental conditions	
Operating temperature range	-10 to +40 °C
Storage temperature range	-40 to +50 °C
Humidity	max. 90 % rel. F, non-condensing
Dimensions	210 x 80 x 50 mm
Weight:	2.1 kg

Optional accessories:

Extension set	FM100-SP-30-50
Extended carrying case	FM 100-AC
Load bar	FM100-SP-600
	FM100-SP-1000
	FM100-SP-1700
	FM100-SP-2900
Barrier Fixture Set for Barriers	FM100-FX Barrier

PC-Analysis-Software PinchPilot

- Multilingual (DE, EN, IT, FR, ES)
- Graphical display of force vs. time
- Calculation of relevant parameters
- Assessment with respect to different standards
- Support for user defined standards
- Printed reports
- Data export (Excel, CSV, PDF)

Other model:

FM100BT-SY-500-2000	Bluetooth
---------------------	-----------

Download App from Google Play Store

- Force Meter - User-friendly app with automatic updates of guidelines and standards updates
- Time-saving - immediate feedback on the measurement result incl. simple report generation
- Paperless office - reduces paper and the associated costs and protects the environment
- Individually usable - integration of the customer's signature possible

System requirements Software PinchPilot a. App Display unit SEB2.2-AC

- Data logger unit with LCD display and
- LED status displays, operating button, serial interface
- optional PC-controlled measurement
- 9 V battery supply
- Real-time clock
- Memory for 100 measurements
- Sensor and PC interface
- Peak value display and effective force display
- Evaluation display i. O./n. i. O.



Subject to changewithout notice

FM200 SERIES

Closing force measuring system for sliding roofs, window lifters, tailgates

The closing force transducer is an electronic closing force measuring device for power-operated windows, sliding roofs and tailgates in the automotive sector. Typical areas of application are testing and production in the automotive industry. It is also increasingly used by technical inspection institutions. Its uncompromising design combines precision with practical robustness and

ensures accurate measured values even after years of use in harsh environments. For measurement set-ups in testing and manufacturing, quick and easy execution is of great importance. For this purpose, Drive Test has developed software that drastically reduces the measurement procedure and the effort required for documentation.

ISO calibrated

- » support of relevant standards - 2000/4 EC, US Standard FMVSS 118
- » precise measurements - through frictionless guidance and platform load cell
- » easy to use - single button operation or remote operation via Microsoft® DLL interface or National Instruments® LabVIEW library
- » complete scope of delivery - including high-quality carrying case and software
- » professional, comprehensive PC software - PinchPilot
- » extensive user support - calibration service, standards revision service ensures the application of the latest standard version
- » flexible customisation - made possible by a variety of available force inputs:
- » customised adaptations also available from DriveTest



APPLICATION



TECHNICAL SPECIFICATIONS

FM200	
Accuracy	+/- 3 N oder 3 % of measured value
Gap width	Minimum 4 mm
Area	50 x 50 mm
Measuring principle	DMS-transducer
Dimensions	240 x 85 x 60 mm
Weight	1,3 kg

Models:

FM200-SU-SY-10-200	stiffness	10 N/mm	measuring range	0 ... 200 N
FM200-SU-SE-20-300	stiffness	20 N/mm	measuring range	0 ... 300 N
FM200-SU-SE-65-300	stiffness	65 N/mm	measuring range	0 ... 300 N

PC-Analysis-Software PinchPilot

- Multilingual (DE, EN, IT, FR, ES)
- Graphical display of force vs. time
- Calculation of relevant parameters
- Assessment with respect to different standards
- Support for user defined standards
- Printed reports
- Data export (Excel, CSV, PDF)

Download App from Google Play Store

- Force Meter - User-friendly app with automatic updates of guidelines and standards updates
- Time-saving - immediate feedback on the measurement result incl. simple report generation
- Paperless office - reduces paper and the associated costs and protects the environment
- Individually usable - integration of the customer's signature possible

System requirements Software PinchPilot a. App

Display unit SEB2.2-AC

- Data logger unit with LCD display and
- LED status displays, operating button, serial interface
- optional PC-controlled measurement
- 9 V battery supply
- Real-time clock
- Memory for 100 measurements
- Sensor and PC interface
- Peak value display and effective force display
- Evaluation display i. O./n. i. O.



Subject to changewithout notice

FM205-WI-SY-10-150

Closing force measuring system for window lifters

The FM 205 is an electronic force measuring system for powered window lifters. Typical use includes R+D and production testing in the automotive industry. The FM 205 is characterized by its ease of use for repetitive measurements. According to the requirements of different standards a large variety of spring stiffnesses is available. It is also increasingly used by technical safety agencies. Combining

rugged construction with precision, the advanced mechanical design delivers exact measurements, even after years of service in an industrial environment. Fast and easy performance of repetitive measurements is an important aspect of standard test scenarios. Drive Test has responded to this requirement by developing software which streamlines the measurement process.

ISO calibrated

- » support of relevant standards - 2000/4 EC, US Standard FMVSS 118
- » precise measurements - uses frictionless guides and a single point (platform) load cell
- » robust construction - manufactured from durable aluminium for long service life in industrial environment
- » easy to use - single button operation or remote operation via Microsoft® DLL interface or National Instruments® LabVIEW library
- » professional software - PinchPilot offers complete functionality
- » different spring stiffnesses available - 2, 5, 10, 20, 65 N/mm
- » Complete delivery - all components packed in high-quality transportation case



APPLICATION



TECHNICAL SPECIFICATIONS

FM205/20	
Application of force	on one side
Measuring range	0 ... 200 N
Accuracy	+/- 3 N (0-100 N) or +/- 3 % (>100 N)
Spring stiffness	20 N/mm
Gap width	Fmax. 5 mm / 0.19"
Area	5 x 80 mm / 0.19 x 3.1"
Force sensor	
Cable length	strain gauge bridge
1.5 m / 4.9 ft	
Dimensions	175 x 75 x 57 mm / 6.8 x 2.9 x 2.2"
Weight	ca. 400 g / 14 oz

- Display device SEB2.2**
- Display device SEB2.2 data logger unit with LCD display and LED status indicators, Control button, USB interface
 - Optional PC-controlled measurement
 - Lithium polymer battery
 - Real time clock
 - Memory for 100 measurements
 - Sensor and PC interface
 - Peak value display and effective power display
 - Rating display i. O./n. i. O.

- Spacers**
- Complete set for all opening widths according to EN 14752:2015
 - Automatic detection of the spacers used
 - Automatic limit value adjustment according to opening width
 - Easy to use, quick assembly without tools
 - Robust design, low weight, POM
 - Together with BIA 600 sensor, SEB2 in a carrying case

- PC evaluation software PinchPilot**
- Multilingual (DE, EN, IT, FR, ES)
 - Graphic representation of the force curve
 - Calculation of the standard-relevant characteristic values
 - Evaluation according to different guidelines possible
 - Custom policy adjustable
 - Log printout
 - Data export (Excel, CSV, PDF)
 - Optional measuring point identification

- Other model:**
- FM205-WI-SE-02-050
 - FM205-WI-SE-05-100
 - FM205-WI-SE-20-200
 - FM205-WI-SE-65-260



Subject to changewithout notice

CLOSING FORCE MEASURING MEASURING DEVICE FOR CLOSING FORCE



BIA600-SY-10-700

For railway doors and sliding steps

Drive Test's BIA 600 is an electronic pinch force measuring system for power driven train and tramway doors. Combining rugged construction with precision, the advanced mechanical design delivers exact measurements, even after years of usage in an industrial environment. Fast and easy performance of repetitive measurements is an important aspect of standard test scenarios. Drive Test has responded

to this requirement by developing software which streamlines the measurement process and drastically reduces documentation effort. Measurements made on a complete vehicle can be entered, printed as a table, and stored in a database with a minimum of user entries.

ISO calibrated

- » applicable standards
DIN EN 14752:2015, DIN EN 14752:2005 (optional)
- » professional software
PinchPilot offers complete functionality
- » spacers for all apertures
required by EN 14752:2015
- » automatic limit setting
according to detected spacers
- » complete delivery all components
packed in high-quality transportation case
- » management support for large
vehicle pools integration in existing
software infrastructure available



APPLICATION



TECHNICAL SPECIFICATIONS

BIA600-SY-10-700

Force entry	both-sided
Measuring range	0-700 N
Accuracy	+/- 3 N (0-100 N)/ +/- 3 % (>100 N)
Stiffness	10 N/mm
Gap width	90 mm
Area	100 x 100 mm
Force sensor	Strain Gauge Bridge
Dimensions	320 x 250 x 110 mm
Weight	3,0 kg

Optional accessories:

Test specimen	Prüfkörpersatz 1-3 Prüfkörper 1 Prüfkörper 2 Prüfkörper 3 Prüfkörper 4 Prüfkörper 5 Prüfkörper 143407
Test block for manual pre-test	

Spacer set

- Complete set for all opening widths according to EN 14752:2015
- Automatic recognition of the spacers used
- Automatic limit value adjustment according to opening width
- Easy to use, quick assembly without tools
- Robust design, low weight, POM
- Together with BIA 600 sensor, SEB2 in a transport case

PC evaluation software PinchPilot

- Multilingual (DE, EN, IT, FR, ES)
- Graphic representation of the force curve
- Calculation of the standard-relevant characteristic values
- Evaluation according to different guidelines possible
- Custom policy adjustable
- Log printout
- Data export (Excel, CSV, PDF)
- Optional measuring point identification

Other model:

BIA600BT-SY-10-700

Bluetooth

Force Meter App downloadable from Google Play Store

- Force Meter - easy-to-use app with automatic guidelines and standards updates
- Time saving - immediate feedback on the measurement result including simpler report generation
- Paperless office - reduces paper and the associated costs and protects the environment
- Can be used individually - integration of the customer's signature possible

System requirements software PinchPilot

Display device SEB2.2-AC

- Data logger unit with LCD display and LED status indicators, control button, serial interface
- Optional PC-controlled measurement
- 9 V battery supply
- Real time clock
- Memory for 100 measurements
- Sensor and PC interface
- Peak value display and effective power display
- Rating display i. O./n. i. O.



Subject to changewithout notice

DATA LOGGING
DATA LOGGER

PCE-VDL 16I

For the parameters temperature, relative humidity, air pressure, light and vibration

The mechanical engineering data logger PCE-VDL 16I from PCE Instruments measures and records the relevant parameters temperature, relative humidity, air pressure, light as well as 3-axis acceleration by means of a vibration sensor. This makes the data logger the ideal tool for monitoring machine vibration and at the same time measuring and recording important environmental conditions of the equipment.

Depending on the sampling rate, the data logger can record for several days. The recorded readings are saved to the internal 32 GB SD card and can be transferred to other media for evaluation where required.

ISO cal option

- » 3-axis acceleration up to 800 Hz
- » measures temperature, humidity, air pressure and light
- » 32 GB SD memory card
- » compact design: 86.8 x 44.1 x 22.2 mm
- » country of origin Germany



APPLICATION



TECHNICAL SPECIFICATIONS

Parameter	
Temperature measuring range	-20 ... +65 °C
Accuracy	±0.2 °C
Sampling rate	1 s ... 1800 s
Relative humidity measuring range	0 ... 100 % RH
Accuracy	±1.8 % RH
Sampling rate	1 s ... 1800 s
Air pressure measuring range	10 ... 2000 mbar
Accuracy	±2 mbar (within range 750 ... 1100 mbar) otherwise ±4 m bar
Sampling rate	1 s ... 1800 s
Light measuring range	0.045 ... 188,000 lux
Sampling rate	1 s 1800 s
3-axis acceleration measuring range	±16 g
Accuracy	±0.24 g
Sampling rate	800 Hz 1 Hz

General technical data of the mini data logger PCE-VDL 16I

Memory capacity	2.5 readings per measurement, 3.2 billion readings with included 32 GB memory card
Keys	start / stop of a measurement; data logger on / off
LED	Log: operating status Alarm: alarm indicator Charge: charging status USB: status of PC connection
Power supply	integrated rechargeable Li-Ion battery 3.7 V / 500 mAh The meter is charged via the USB interface.
Integrated sensors	3-axis acceleration
Interface	USB
PC software	free setup and evaluation software (Windows XP / Vista / 7 / 8 / 10 32 bit / 64 bit) to record and evaluate data
Operating conditions	temperature -20 ... +65 °C
Storage conditions	temperature +5 ... +45 °C (ideal storage conditions for battery) 10 ... 95 % RH, non-condensing
Standards	complies with EU regulation RoHS/WEEE
Weight	approx. 60 g
Dimensions (L x W x H)	87 x 44 x 23 mm

Optional accessories:

Mounting plate

Order code PCE-VDL MNT



Subject to changewithout notice

DEW POINT MEASUREMENT

DEW POINT METER

PCE-DPM 3

Dew point meter for compressed air pipes

The dew point meter is a mobile testing device for monitoring the quality of compressed air on stationary and mobile compressed air generators. This dew point meter measures the temperature, the relative humidity, H₂O and calculates the current dew point up to an ambient pressure of 20 bar. Thanks to the sintered cap, the moisture meter in the pressure lines is protected from dirt, moisture and high

flow speeds. This increases the service life of the dew point meter's sensors. The data memory of the moisture meter enables the course of the measurement parameters to be recorded in a pressure line. The data recorded by the moisture meter is permanently stored in the internal memory.

ISO cal option

- » data storage with CSV data export
- » dew point, H₂O, temperature, humidity measurement
- » for inline measurement of pressure pipes
- » battery operation for mobile use
- » with G1/2" connection thread
- » sensors protected with sintered filters



APPLICATION



TECHNICAL SPECIFICATIONS

Measurement	Temperature
Measuring range	-10 ... 60 °C / 14 ... 140 °F
Resolution	0.01 °C / 0.018 °F
Accuracy at 20°C / 68°F	-10 ... 50 °C / 14 ... 122 °F: ± 0.3 °C / 0.5 °F
Measurement	Relative humidity
Measuring range	0 ... 100 %
Resolution	0.01 %
Accuracy at 20°C / 68°F	<5 %: ±(0.025 % + 17.5 % of mv)
	>5 %: ±(1 % + 5 % of mv)
	>15 %: ±(2 % + 3 % of mv)
Measurement	Dew point*
Measuring range	-50 ... 30 °C / -58 ... 86 °F
Resolution	0.01 °C / 0.018 °F
Accuracy	-40 ... 20 °C / -40 ... 68 °F: ±2 °C / 3.6 °F
	-50 ... -40 °C / -58 ... -40 °F: ±2.5 °C / 4.5 °F

*The accuracy of the dew point relates to an ambient temperature of 16 ... 25 °C / 61 ... 77 °F

Measurement	H₂O
Measuring range	40 ... 20,000 ppm
Resolution	1 ppm
Accuracy at 20°C / 68°F	±(7.3 ppm + 8.3 %)
Environmental conditions	-10 ... 60 °C / 14 ... 140 °F
	0 ... 20 bar (absolute)
Response time at: 0.2 m / s, 1 bar, 20°C / 68°F, 63% RH [90%]	0 ... 40 °C / 32 ... 104 °F: 20 s [120 s]
Data storage	-40 ... 0 °C / -40 ... 32 °F: 10 s [20 s]
Adjustable storage rates	For approx. 50,000 measuring points
	10 seconds
Adjustable recording time	1, 5, 10, 20, minutes
File format	1, 5, 12, 24, 48 hours
Cable length	CSV
Thread	approx. 1.5 m / 4.9 ft
Thread length	G1/2"
Probe length	1.2 cm
Probe width	5.2 cm
Display	1.2 cm
Power supply	2.3" LCD
Power supply power pack	Battery 3.7 V DC, 3000-mAh
	Primary: 100 ... 240 V AC, 0.25 A
	Secondary: 5 V DC, 1 A
Interface 7 mains connection	Micro USB
Weight	Approx. 610 g / 1.3 lbs



Subject to changewithout notice

DEW POINT MEASUREMENT
DEW POINT METER

PCE-DPM 10

Mobile dew point meter for compressed air pipes (-100 ... +50 °C Td)

The dew point meter PCE-DPM 10 is a hand-held instrument for measuring dew point, pressure and humidity in compressed air systems. The unique sensor system, which combines a QCM and a Polymer sensor in a single unit, enables the user to measure the dew point in a range from -100 °C Td up to +20 °C Td. The integrated pressure sensor allows the measured value into any

humidity value needed , for example ppm (v) or atmospheric dew point.

The PCE-DPM 10 dew point meter offers a unique algorithm for predicting final dew point values.

ISO cal option

- » measures dew point, temperature and pressure
- » -100 ... +20 °C Td with pressure sensor
- » measurement according to ISO 8573-1
- » PDF report function
- » integrated pressure sensor
- » touch screen for easy operation



APPLICATION



TECHNICAL SPECIFICATIONS

Dew point	
Measuring range	-100 ... +20 °C Td
Accuracy	±1 °C Td (0 ... 20 °C Td) ±2 °C Td (-70 ... 0 / +20 ... +50 °C Td) ±3 °C Td (-100 ... -70 °C Td)
Selectable units	%rH, °C Td, g/m³, mg/m³, g/m³ atm. , mg/m³ atm. , ppmv, g/kg, °C Td atm.
Reproducibility	0.5 °C
Sensor	QCM + Polymer
Pressure	
Accuracy	0.5 % FS
Measuring range	0 ... 1.5 MPa (g)
Sensor	Piezo resistance sensor
Temperature	
Accuracy	±0.3 °C
Measuring range	-30 ... +50 °C
Sensor	PT 100
Display	3.5" colour LCD touch screen
Memory	Integrated mass memory, up to 30 million recorded data sets (4 channels each)
Power supply	USB charger: 5 V, 3 A, connection: USB-C
Operating time	8 h
Data interface	USB
Housing	PC + ABS
Metal parts	aluminium
Protection	class IP30
Dimensions	206 x 98 x 62 mm
Weight	2.7 kg Complete set in transport case
Operating conditions	
Medium	Air, N ₂ , O ₂ , Argon, CO ₂
Medium temperature	-30 ... +50 °C
Medium humidity	0 ... 90 %, no condensation
Operating pressures	-0.1 ... 1.6 MPa (g)*
Ambient temperature	0 ... +40 °C
Ambient humidity	0 ... 80 % rH
Storage temperature	-20 ... +50 °C
Transport temperature	-30 ... 70 °C




Subject to changewithout notice

COMPANY LOCATIONS WORLDWIDE



PCE HOLDING AG

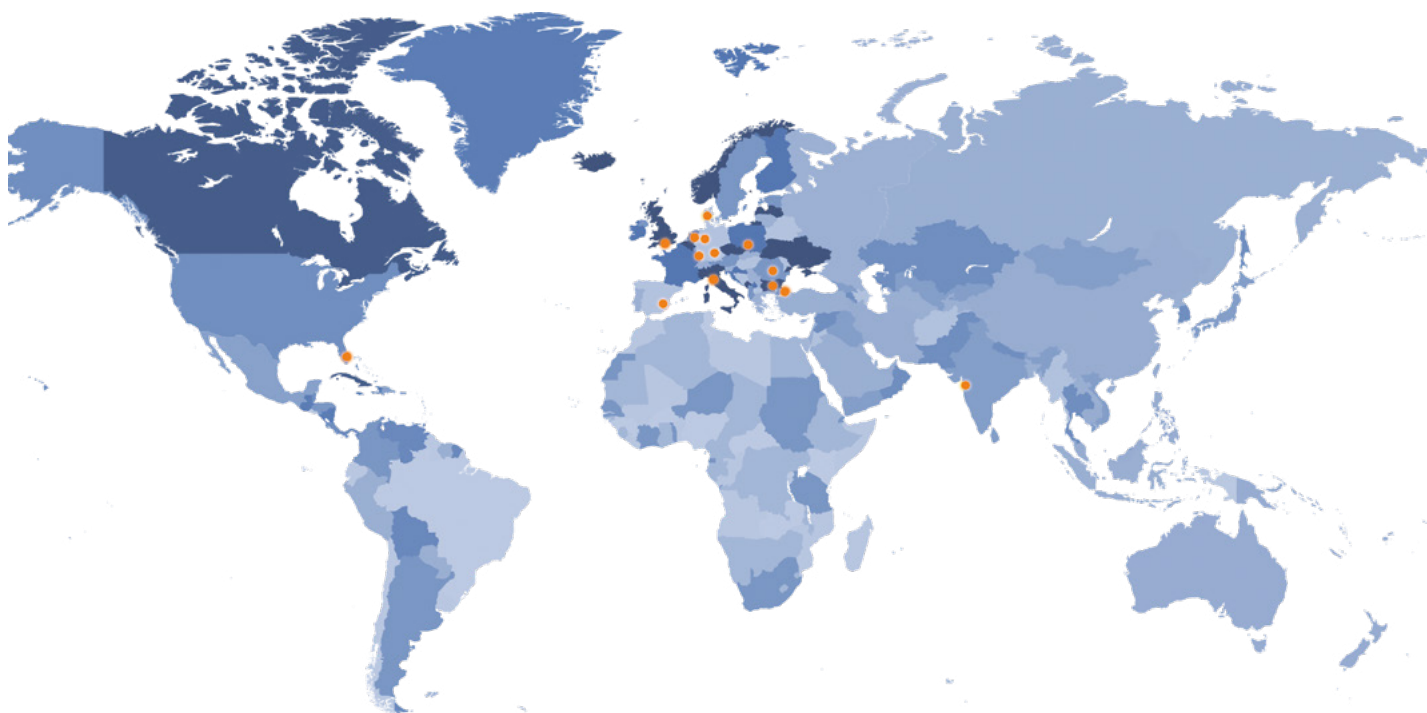

CONTACT

PCE Deutschland GmbH
Im Langel 26
59872 Meschede
Germany

Martin Weber
+49 (0) 2903 / 976 99 499
mwe@pce-instruments.com

Martin Dietz
+49 (0) 2903 / 976 99 45
mdi@pce-instruments.com

www.pce-instruments.com

Germany
Germany
Spain
USA
UK
France
Italy
Turkey
Netherlands
Poland
Denmark
Bulgaria
Romania
India

PCE Deutschland GmbH
DriveTest GmbH
PCE Iberica S.L.
PCE Americas Inc.
PCE Instruments UK Ltd.
PCE Instruments France EURL
PCE Italia s.r.l.
PCE Teknik Cihazlar Ltd. Şti.
PCE Brookhuis B.V.
PCE Instruments Polska Sp. z o. o.
PCE Instruments Denmark ApS
PCE Instruments Bulgaria EOOD
PCE Instruments RO SRL
PCE Instruments India Pvt. Ltd

www.pce-instruments.com/deutsch
www.drivetest.de/en
www.pce-instruments.com/espanol
www.pce-instruments.com/us
www.pce-instruments.com/english
www.pce-instruments.com/french
www.pce-instruments.com/italiano
www.pce-instruments.com/turkish
www.pce-instruments.com/dutch
www.pce-instruments.com/polish
www.pce-instruments.com/dansk