


# Differential Pressure Meter PCE-P05

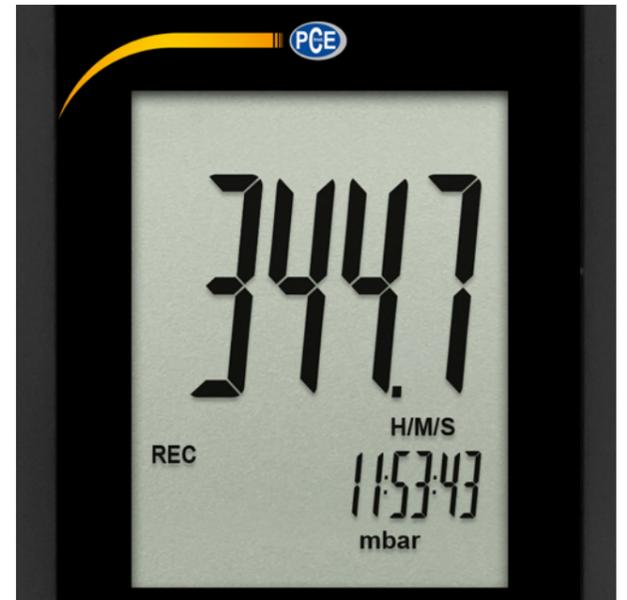

## PCE-P05 Differential Pressure Meter

**Portable handheld manometer measures differential pressure from -0.344 to 0.344 bar (-5.000 to 5.000 psi) / Features real-time data-logging capabilities using the included PC software and USB cable**

PCE-P05 is a portable handheld digital differential pressure meter or manometer used to measure differential pressure in pneumatic, compressor and pump installations, valves, tanks and heating, ventilation and air conditioning (HVAC) systems. The PCE-P05 displays min / max / average values right on the meter's screen for comparison against current measurement values.

In addition, the PCE-P05 differential pressure manometer features real-time data-logging capabilities with an adjustable interval from 1 second to 24 hours. The device comes with 4 x 30 cm /11.81 in silicon tubes, 1 x 9V block battery and 1 x AC power adapter. Also included in the delivery contents are PC-compatible software and a USB cable. The software can be used to detect and document pressure fluctuations, and to display the data graphically or in a table. For real-time data recording, simply connect the differential manometer via USB to your computer, and save the measured values according to your selected time interval. You can then calculate average values directly in the software or export the saved data to Microsoft Excel.

- -0.344 to 0.344 bar (-5.000 to 5.000 psi) measuring range

- ▶ 11 measurement units: bar, mmHg, ozin<sup>2</sup>, kgcm<sup>2</sup>, psi, inH<sub>2</sub>O, kPa, ftH<sub>2</sub>O, inHg, cmH<sub>2</sub>O, mbar
- ▶ Data hold function
- ▶ Zero adjustment at any time
- ▶ Low battery indicator
- ▶ Auto power off (can be disabled)
- ▶ Large dual LCD screen with backlight (on / off mode)
- ▶ Displays min / max / average values right on the meter's screen for comparison against current measurement values
- ▶ Features real-time data-logging capabilities using the included PC software and USB cable

# Specifications

## Measuring range (±)

inH2O	138.30
psi	5.000
mbar	344.7
kPa	34.47
inHg	1.018
mmHg	258.5
ozin <sup>2</sup>	80.00
ftH2O	11.53
cmH2O	351.5
kgcm <sup>2</sup>	0.351
bar	0.344

## Resolution

inH2O	0.1
psi	0.001
mbar	0.1
kPa	0.01
inHg	0.001
mmHg	0.1
ozin <sup>2</sup>	0.01
ftH2O	0.001
cmH2O	0.1
kgcm <sup>2</sup>	0.001
bar	0.001

Measuring range: 0.000 to 5.000 psi

Units of measure: bar, mmHg, ozin<sup>2</sup>, kgcm<sup>2</sup>, psi, inH2O, kPa, ftH2O, inHg, cmH2O, mbar

Resolution: 0.001 psi

Accuracy: ±0.2% of full scale at 25°C / 77°F

Response time: 0.5 seconds

Power supply: 1 x 9V battery or 1 x 9V DC / 500-mA power supply (included)

Approx. Dimensions: 210 x 75 x 50 mm / 8.27 x 2.95 x 1.97 in

Approx. Weight: 650 g / 1.44 lb

See user manual for complete technical specifications.

# More information

Manual



Software Manual



More product info



Similar products



Subject to change